



YBH4002AF

L4802F

VPN




配光曲線図 (cd/1000lm)

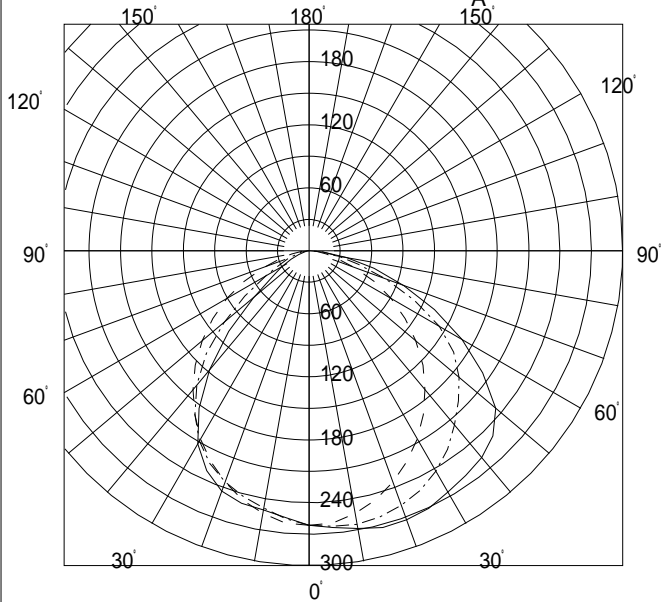

諸特性

光源		FHF32EX-N-H(非常灯)			
最大取付間隔		A-A 1.41H		B-B 1.61H	
器具 効率	上方光束	0.0%			
	下方光束	68.6%			
	計	68.6%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

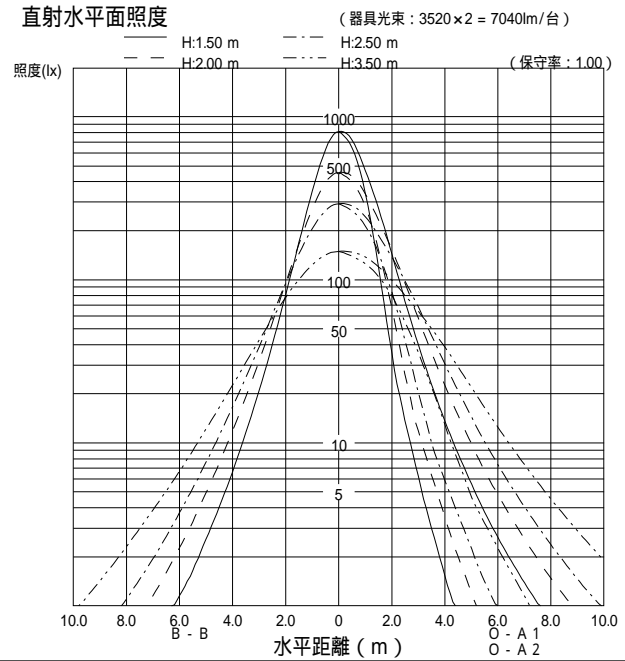

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	32	44	51	57	63	66	72	75	77	80	82	84	86
		10	30	40	46	51	56	58	62	65	66	68	69	71	72
	50	30	23	34	41	48	54	58	64	69	72	76	78	81	84
		10	22	33	39	44	50	53	58	61	63	65	67	69	71
	30	30	17	28	35	41	48	52	59	64	67	72	75	79	82
70		10	17	28	33	39	45	48	54	58	60	63	65	68	69
	70	30	31	43	50	55	61	64	69	73	75	77	79	81	83
		10	29	40	45	50	55	57	61	64	65	67	68	70	71
	50	30	22	34	41	47	53	57	63	67	70	73	76	79	81
		10	21	32	38	44	49	52	57	60	62	65	66	68	70
50	30	30	17	28	35	41	47	51	58	62	66	70	73	76	79
		10	17	27	33	39	45	48	53	57	59	62	65	67	69
	70	30	14	24	30	35	41	45	50	54	57	60	63	66	68
		10	14	24	30	35	41	45	50	54	57	60	63	66	68
	50	30	22	33	39	45	51	54	60	64	66	69	71	74	75
30		10	21	31	37	43	48	51	55	59	61	63	65	67	68
	30	30	17	28	34	40	46	50	55	60	63	66	69	72	74
		10	17	27	33	38	44	47	52	56	58	61	63	66	67
	70	30	14	24	29	35	41	44	50	54	56	60	62	64	66
		10	14	24	29	35	41	44	50	54	56	60	62	64	66
0	30	30	17	27	33	39	45	48	53	57	60	63	65	68	70
		10	17	27	32	38	43	47	51	55	57	60	62	64	66
0	0	0	13	23	28	33	39	42	47	51	54	57	59	61	63