



YBH4002AF

L4862A

VPN




配光曲線図 (cd/1000lm)

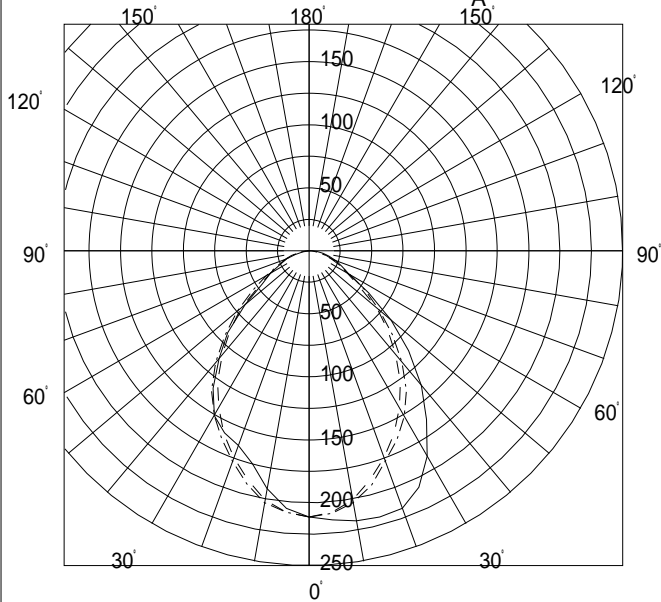

諸特性

光源		FHF32EX-N-H(非常灯)			
最大取付間隔		A-A 1.22H		B-B 1.51H	
器具 効率	上方光束	0.0%			
	下方光束	40.4%			
	計	40.4%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

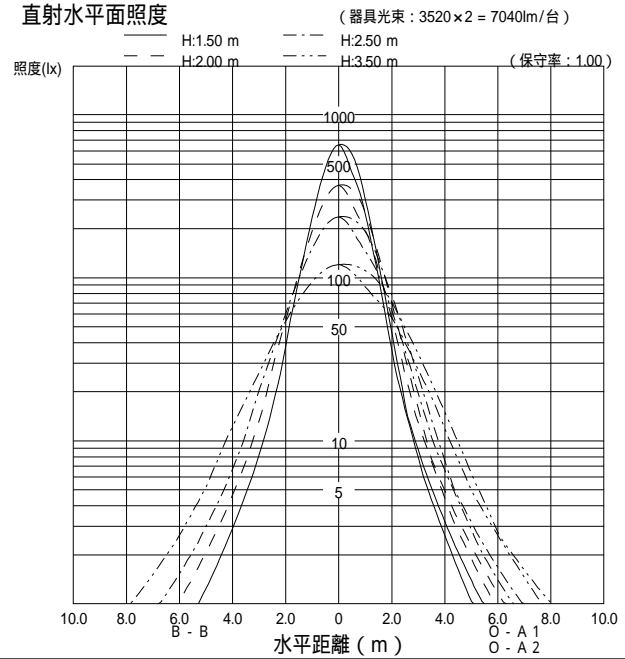

作業面照明率 (× 0 . 0 1)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	20	28	32	35	39	40	43	45	46	48	49	50	51	
		10	19	26	29	32	34	35	37	39	39	40	41	42	42	
	50	30	15	23	26	30	34	36	39	42	43	45	47	48	49	
		10	14	21	25	28	31	33	35	37	38	39	40	41	42	
70	30	30	12	19	23	27	30	33	36	39	41	43	45	47	48	
		10	12	19	22	25	29	30	33	35	36	38	39	40	41	
	70	30	20	27	31	34	37	39	42	43	45	46	47	48	49	
		10	19	25	28	31	34	35	37	38	39	40	41	41	42	
50	50	30	15	22	26	30	33	35	38	41	42	44	45	47	48	
		10	14	21	24	28	31	32	35	36	37	39	39	40	41	
	30	30	12	19	23	26	30	32	35	38	40	42	43	45	47	
		10	12	19	22	25	28	30	33	35	36	37	39	40	41	
30	50	30	14	22	25	28	32	34	36	38	40	41	42	44	45	
		10	14	21	24	27	30	31	34	36	37	38	39	40	40	
	30	30	12	19	22	26	29	31	34	37	38	40	41	43	44	
		10	12	19	22	25	28	30	32	34	35	37	38	39	40	
0	30	30	12	19	22	25	29	30	33	35	36	38	39	40	41	
	10	10	12	18	21	24	28	29	32	34	35	36	37	38	39	
0	0	0	10	16	19	22	25	27	30	32	33	34	35	37	38	