


YL8002F


VPJ




○諸特性

光源		FHF86EN/RX・BK			
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	2.47m	3.15m	3.87m	4.58m
	B-B	2.85m	3.23m	3.70m	4.25m
器具効率	上方光束	下方光束		計	
	27.6%	60.3%		87.8%	
保守率	良い 0.730	普通 0.690	悪い 0.610		

○配光曲線図 (cd/1000lm)

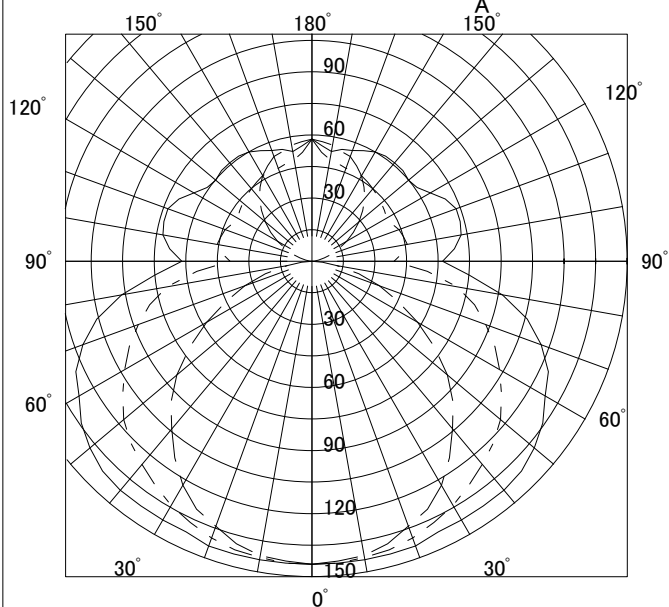

○直射水平面照度

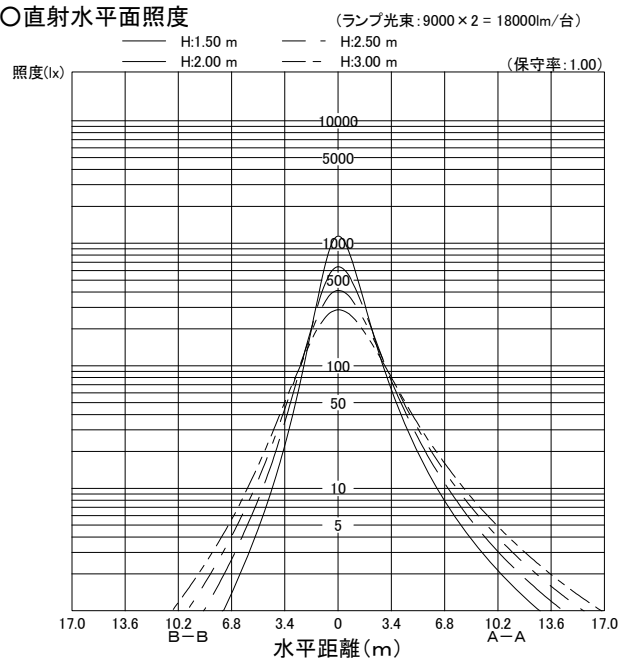

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	35	48	56	63	69	74	81	85	88	93	95	99	101
		10	33	44	51	56	62	65	70	74	76	79	81	83	85
	50	30	24	35	43	50	57	62	70	76	80	86	89	94	98
		10	23	33	40	46	52	56	63	67	70	74	77	80	82
70	30	30	18	27	34	41	48	53	62	68	73	79	84	90	94
		10	17	26	33	39	45	50	56	61	65	70	73	77	80
	10	30	13	22	28	33	40	44	51	57	60	66	70	74	78
		10	10	13	22	28	33	40	44	51	57	60	66	70	74
50	70	30	33	44	52	58	64	69	75	79	82	86	88	92	94
		10	31	41	48	53	58	61	66	70	72	75	77	79	81
	50	30	23	33	40	47	54	58	66	71	75	80	83	87	91
		10	22	31	38	44	50	54	59	64	67	70	73	76	79
30	30	17	26	33	39	46	50	58	64	68	74	79	84	88	
	10	16	25	31	37	43	47	54	59	62	67	70	73	77	
	10	10	13	21	26	32	38	42	49	54	58	63	67	71	75
0	50	30	20	29	36	41	47	51	57	62	65	69	72	76	79
		10	20	28	34	39	45	48	53	57	60	64	66	69	71
	30	30	15	23	29	35	41	45	52	57	60	65	69	73	77
30	10	15	23	28	34	39	43	49	53	56	60	63	67	70	
	10	10	12	19	24	29	35	39	45	50	53	58	61	65	68
30	30	30	13	21	26	31	36	40	46	50	53	57	60	64	67
	10	10	10	13	21	26	30	35	39	44	48	51	55	57	60
10	10	10	10	17	22	27	32	35	41	45	48	52	55	59	62
0	0	0	8	14	18	22	26	29	34	37	40	44	46	49	52