



○諸特性

光源		FHF32EX-N-H				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.16m	2.85m	3.55m	4.26m	
	B-B	2.16m	2.70m	3.31m	3.91m	
器具効率	上方光束	下方光束		計		
	0.0%	75.7%		75.7%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

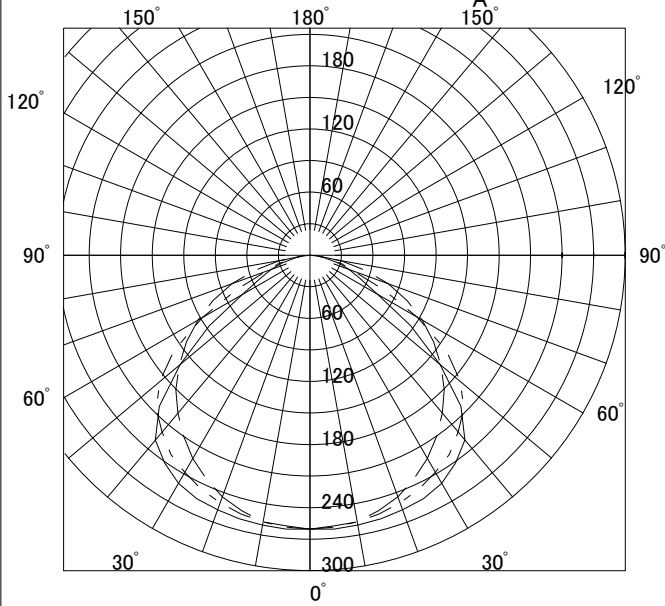

○直射水平面照度

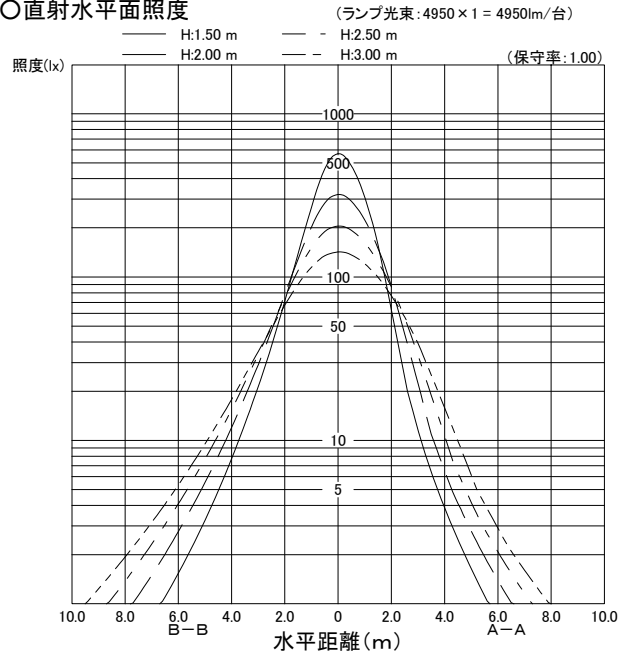

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	34	48	56	63	70	73	79	83	86	89	91	93	95
		10	32	44	51	57	62	65	69	72	74	76	77	78	80
	50	30	24	37	45	52	60	64	71	76	80	84	87	90	93
		10	23	35	42	49	55	58	64	67	70	73	74	77	78
70	30	30	19	30	38	45	53	57	65	71	74	79	83	87	90
		10	18	30	36	43	50	53	59	64	66	70	72	75	77
	10	30	15	26	32	39	45	49	56	60	63	67	70	73	76
		10	15	26	32	39	45	49	56	60	63	67	70	73	76
50	70	30	34	47	54	61	67	71	77	80	83	86	88	90	92
		10	32	43	50	55	61	64	68	71	72	75	76	77	79
	50	30	24	36	44	51	58	63	69	74	77	81	84	87	89
		10	23	35	42	48	54	58	63	67	69	72	74	76	77
30	30	18	30	38	45	52	57	64	69	73	77	81	84	87	
	10	18	29	36	43	49	53	59	63	66	69	71	74	76	
	10	15	26	32	39	45	49	55	60	63	67	70	73	75	
0	50	30	23	35	43	49	56	60	66	70	73	77	79	82	84
		10	23	34	41	47	53	56	61	65	67	70	72	74	76
	30	30	18	30	37	44	51	55	61	66	69	74	76	80	82
10		18	29	36	42	48	52	58	62	65	68	70	73	75	
30	10	30	18	29	36	43	49	53	59	64	66	70	72	75	77
		10	18	29	35	41	48	51	57	61	63	67	69	71	73
0	10	30	15	25	32	38	45	48	54	59	61	65	67	70	72
		10	15	25	32	38	45	48	54	59	61	65	67	70	72
0	0	30	13	24	30	36	43	47	53	57	59	63	65	68	70
		10	13	24	30	36	43	47	53	57	59	63	65	68	70