


YS4062

L4912

PH




配光曲線図 (cd/1000lm)

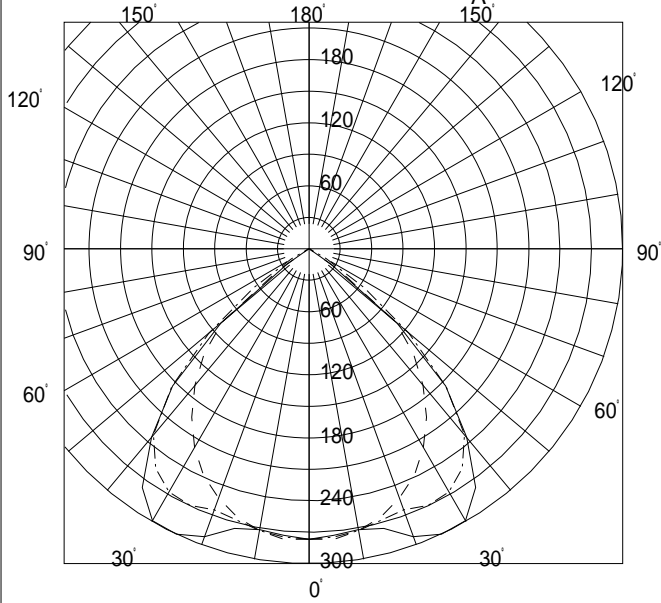

諸特性

光源		FHF32EX-N-H			
最大取付間隔		A-A 1.50H		B-B 1.54H	
器具 効率	上方光束	0.0%			
	下方光束	56.2%			
	計	56.2%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

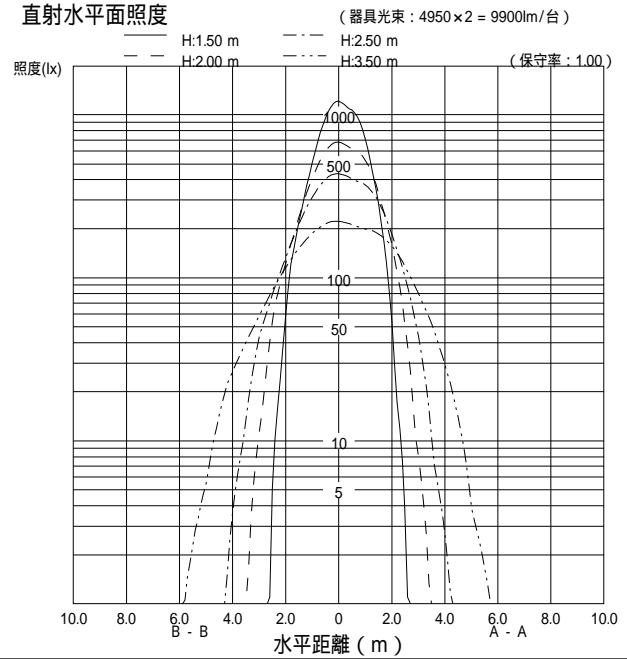

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	30	41	47	52	56	59	62	65	66	68	69	70	71
		10	28	38	43	47	50	52	54	56	56	57	58	59	59
	50	30	23	35	40	45	51	53	58	61	62	65	66	68	69
		10	22	33	38	42	47	48	51	54	55	56	57	58	58
70	30	30	19	30	36	41	47	49	54	57	59	62	64	66	68
		10	19	29	34	39	44	46	49	52	53	55	56	57	58
	10	10	16	27	32	37	42	44	47	50	52	53	55	56	57
	50	70	30	29	41	46	51	55	57	60	63	64	65	66	67
		10	27	38	42	46	49	51	53	55	56	57	57	58	58
50		30	23	34	39	45	50	52	56	59	61	63	64	66	67
		10	22	33	37	42	46	48	51	53	54	55	56	57	58
30	30	30	19	30	35	41	46	49	53	56	58	60	62	64	66
		10	19	29	34	39	44	46	49	51	53	54	55	56	57
	10	10	16	27	32	37	42	44	47	50	51	53	54	55	56
	0	50	30	22	33	38	43	48	50	54	56	58	59	60	62
		10	21	32	37	41	45	47	50	52	53	54	55	56	56
30		30	19	30	35	40	45	47	51	54	56	58	59	60	62
		10	18	29	34	38	43	45	48	51	52	53	54	55	56
30	30	30	18	29	34	39	44	46	49	52	53	55	56	57	58
		10	18	29	33	38	43	44	48	50	51	52	53	54	55
0	0	0	15	26	30	35	40	42	45	48	49	50	51	52	53