



YS4062
B4312A
PX




○諸特性

光源		FHF32EX-N-H					
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	1.86m	2.45m	3.05m	3.64m		
	B-B	2.13m	2.66m	3.24m	3.83m		
器具効率		上方光束	下方光束	計			
		0.0%	45.5%	45.5%			
保守率		良い	0.690	普通	0.650	悪い	0.610

○配光曲線図 (cd/1000lm)

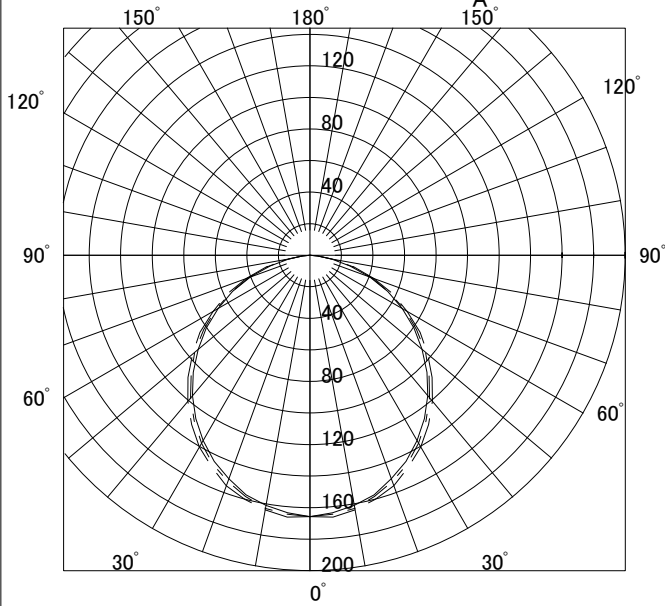

○直射水平面照度

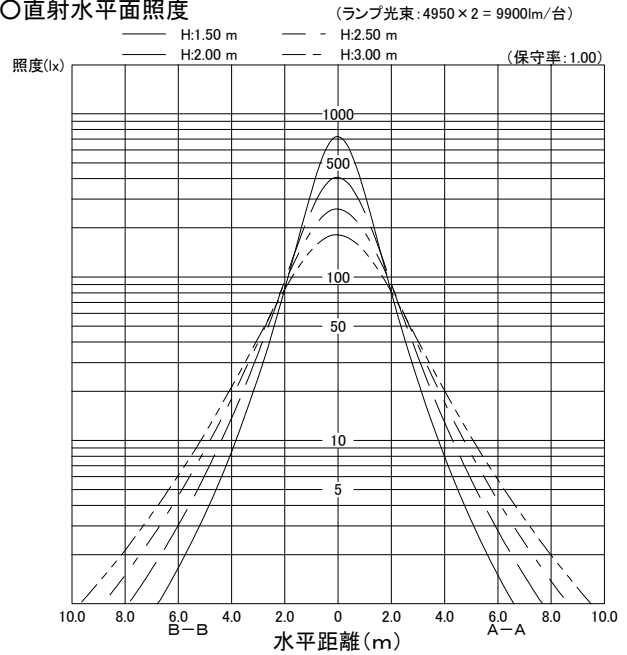

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	21	29	34	38	41	44	47	50	51	53	55	56	57
		10	20	27	30	34	37	39	41	43	44	45	46	47	48
	50	30	15	22	27	31	35	38	42	45	47	50	52	54	56
		10	14	21	25	29	32	35	38	40	42	43	45	46	47
70	30	30	11	18	23	27	31	34	38	42	44	47	50	52	54
		10	11	18	22	25	29	31	35	38	39	42	43	45	46
	10	10	9	15	19	23	27	29	33	36	38	40	42	44	46
		70	20	28	33	36	40	42	46	48	49	51	53	54	55
50	50	30	15	22	26	30	35	37	41	44	46	49	50	52	54
		10	14	21	25	28	32	34	37	40	41	43	44	46	47
	30	30	11	18	22	26	31	33	38	41	43	46	48	51	53
		10	11	18	21	25	29	31	35	37	39	41	43	45	46
30	10	10	9	15	19	23	27	29	33	36	37	40	42	44	45
		50	14	21	25	29	33	36	39	42	44	46	47	49	50
	30	30	11	18	22	26	30	32	36	39	41	44	46	48	49
		10	11	17	21	25	29	31	34	37	38	41	42	44	45
0	0	30	11	18	21	25	29	31	35	38	39	42	43	45	47
		10	11	17	21	24	28	30	34	36	38	40	41	43	44
0	0	10	9	15	19	22	26	28	32	35	36	39	40	42	44
		0	8	14	18	21	25	27	31	34	35	38	39	41	42