



YS4062
L4902A
PX




○諸特性

光源		FHF32EX-N-H			
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	2.01m	2.63m	3.28m	3.91m
	B-B	2.04m	2.53m	3.08m	3.63m
器具効率		上方光束	下方光束	計	
		0.0%	65.7%	65.7%	
保守率		良い 0.730	普通 0.690	悪い 0.610	0.610

○配光曲線図 (cd/1000lm)

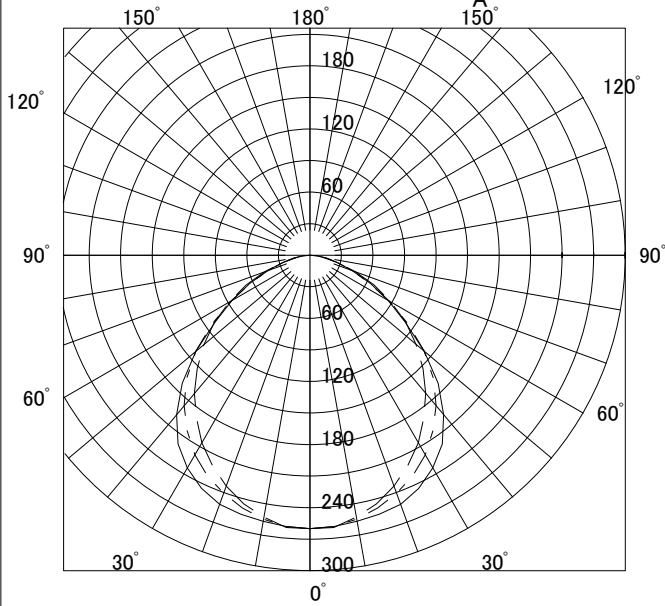

○直射水平面照度

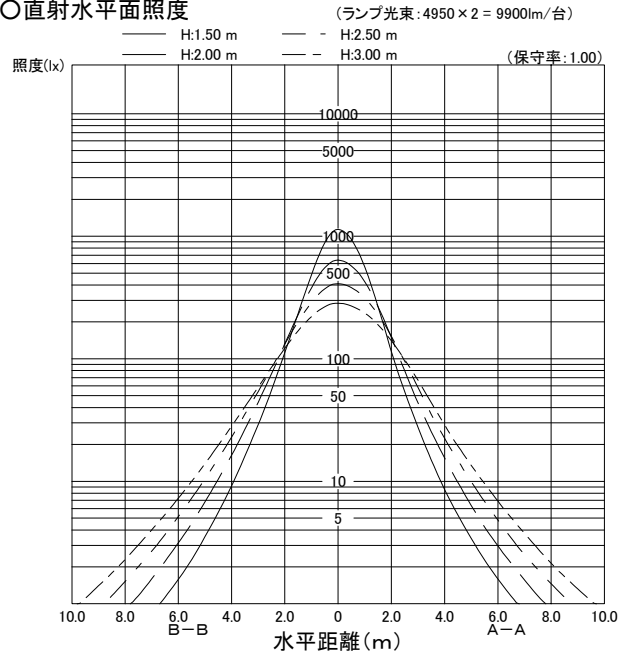

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	31	43	50	56	61	64	69	73	75	77	79	81	83
		10	29	40	45	50	54	57	60	63	64	66	67	68	69
	50	30	22	34	40	47	53	57	63	67	70	73	76	78	81
		10	22	32	38	43	49	51	56	59	61	63	65	67	68
70	30	30	18	28	34	41	47	51	57	62	65	70	72	76	79
		10	17	27	33	39	44	47	52	56	58	61	63	65	67
	10	10	14	24	29	35	41	44	49	53	56	59	61	64	66
	70	30	30	42	48	54	59	62	67	70	72	75	76	78	80
50		10	29	39	44	49	53	56	59	62	63	65	66	67	68
	50	30	22	33	40	46	52	55	61	65	68	71	73	76	78
		10	21	32	38	43	48	51	55	58	60	63	64	66	67
	30	30	17	28	34	40	46	50	56	61	64	68	70	74	76
30		10	17	27	33	38	44	47	52	56	58	61	62	65	66
	10	10	14	24	29	35	41	44	49	53	55	59	61	63	65
	50	30	21	32	38	44	50	53	58	62	64	67	69	71	73
		10	21	31	37	42	47	50	54	57	59	61	63	65	66
0	30	30	17	28	33	39	45	49	54	58	61	64	67	69	72
		10	17	27	32	38	43	46	51	55	57	59	61	63	65
	10	10	14	24	29	34	40	43	48	52	54	57	59	61	63
0	0	0	13	23	28	33	39	42	47	50	52	55	57	60	61