



YS4062
L4922
PX




○諸特性

光源		FHF32EX-N-H					
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	2.18m	2.88m	3.60m	4.32m		
	B-B	2.01m	2.50m	3.05m	3.61m		
器具効率		上方光束	下方光束	計			
		0.0%	55.2%	55.2%			
保守率		良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

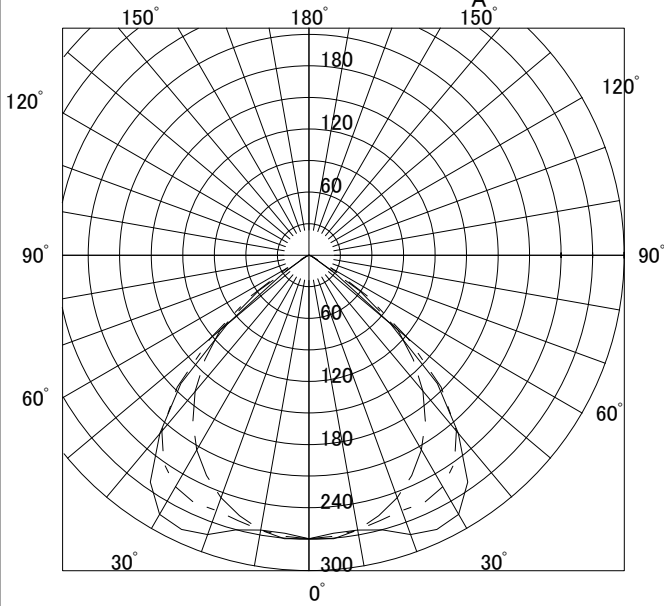

○直射水平面照度

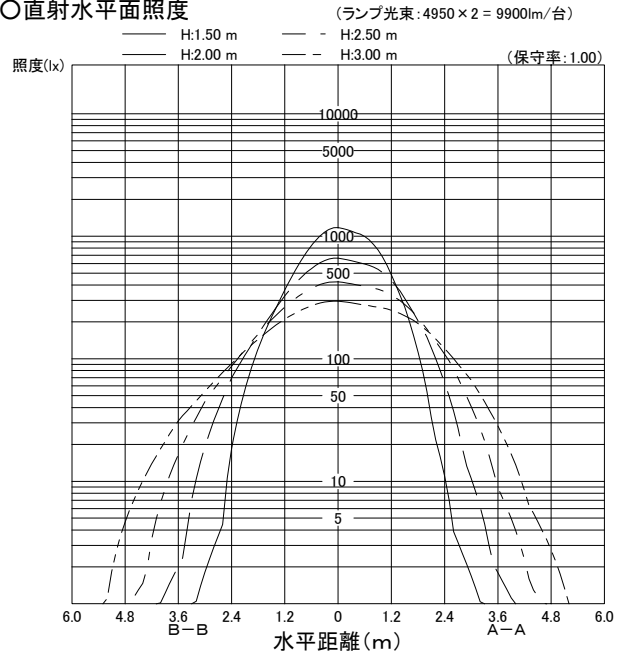

作業面照明率(×0.01)																
反射率(%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	29	41	46	51	56	58	61	64	65	67	68	69	70	
		10	28	38	42	46	49	51	53	55	56	57	57	58	59	
	50	30	23	34	39	45	50	53	57	60	62	64	65	67	68	
		10	22	32	37	42	46	48	51	53	54	55	56	57	58	
70	30	30	19	30	35	40	46	49	53	57	59	61	63	65	67	
		10	18	29	34	38	43	45	49	51	52	54	55	56	57	
	10	10	16	26	31	36	41	43	47	49	51	53	54	55	56	
		70	30	29	40	45	50	54	56	60	62	63	64	65	67	67
50	50	30	22	33	39	44	49	52	55	58	60	62	63	65	66	
		10	22	32	37	41	45	47	50	52	53	55	56	56	57	
	30	30	19	30	35	40	45	48	52	55	57	60	61	63	65	
		10	18	29	33	38	43	45	48	51	52	53	54	56	56	
30	10	10	16	26	31	36	41	43	46	49	50	52	54	55	56	
		50	30	22	33	38	43	47	50	53	56	57	59	60	61	62
	30	30	18	29	34	39	44	47	50	53	55	57	58	60	61	62
		10	18	28	33	38	42	44	48	50	51	53	54	55	55	55
0	0	30	18	29	34	38	43	45	49	51	53	54	55	57	58	
		10	16	26	31	35	40	42	46	48	49	51	52	53	54	54
0	0	0	15	25	30	35	39	41	44	47	48	50	51	52	52	