



YS4062
L4932
PX




○諸特性

光源		FHF32EX-N-H					
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	1.91m	2.49m	3.11m	3.71m		
	B-B	1.86m	2.26m	2.73m	3.21m		
器具効率		上方光束	下方光束	計			
		0.0%	58.0%	58.0%			
保守率		良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

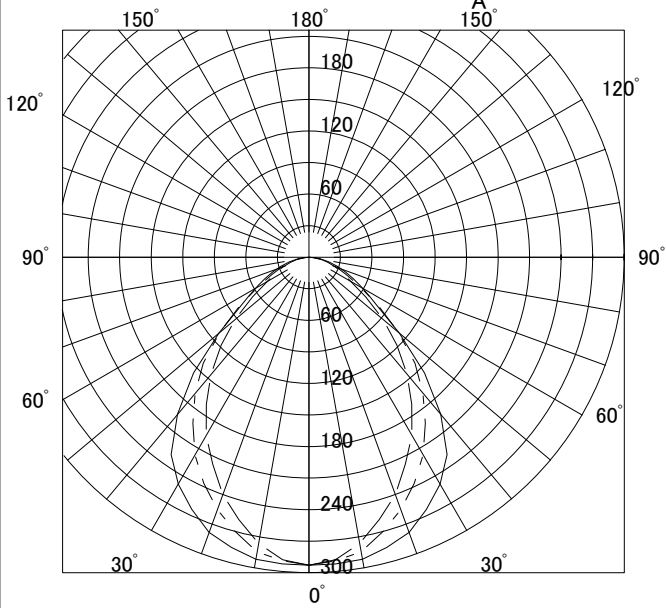

○直射水平面照度

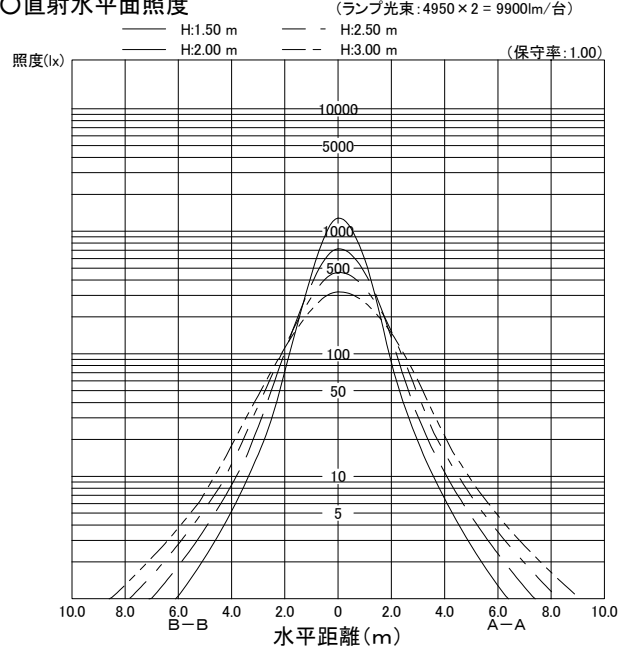

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	29	41	46	51	56	58	62	65	67	69	70	72	73
		10	28	37	42	46	50	52	54	56	57	59	60	61	61
	50	30	22	33	38	44	49	52	57	60	63	66	68	70	72
		10	21	31	36	41	45	47	51	53	55	57	58	59	60
70	30	30	18	28	33	39	44	47	53	57	59	63	65	68	70
		10	18	27	32	37	42	44	48	51	53	55	57	58	60
	10	10	15	25	29	34	39	41	46	49	51	53	55	57	59
		70	29	40	45	50	54	57	60	63	65	67	68	69	71
50	50	30	22	33	38	43	48	51	56	59	61	64	65	68	69
		10	21	31	36	40	45	47	50	53	54	56	57	59	60
	30	30	18	28	33	38	44	47	52	55	58	61	63	66	68
		10	18	27	32	37	41	44	48	51	52	55	56	58	59
30	50	30	21	32	37	42	46	49	53	56	58	60	62	63	65
		10	21	30	35	39	44	46	49	52	53	55	56	58	59
	30	30	18	28	32	37	43	45	50	53	55	58	60	62	64
		10	17	27	32	36	41	43	47	50	51	54	55	57	58
0	30	10	15	25	29	34	39	41	45	48	50	52	54	56	57
		10	15	25	29	33	38	41	44	47	49	52	53	55	56
	10	10	14	24	28	32	37	39	43	46	48	50	52	53	55
		10	14	24	28	32	37	39	43	46	48	50	52	53	55