



YS4062

D4092

PX




配光曲線図 (cd/1000lm)

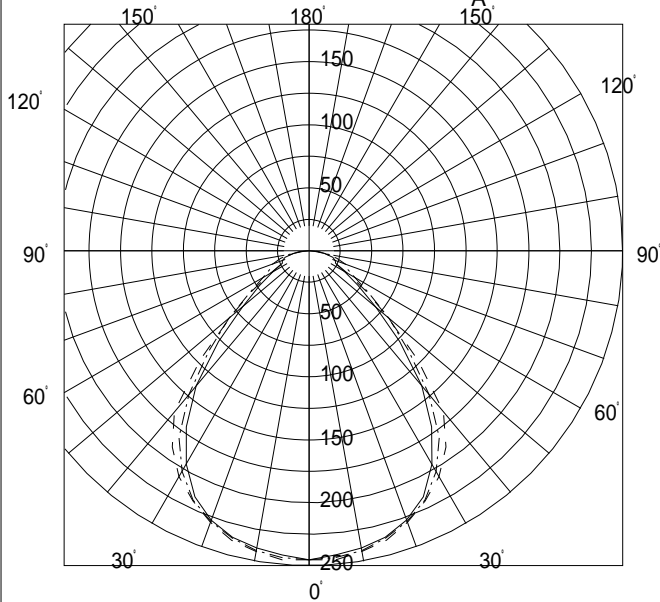

諸特性

光源		FHF32EX-NF			
最大取付間隔		A-A 1.20H		B-B 1.57H	
器具 効率	上方光束	0.0%			
	下方光束	49.9%			
	計	49.9%			
保守率		良	0.700	中	0.660 否 0.620

直射水平面照度

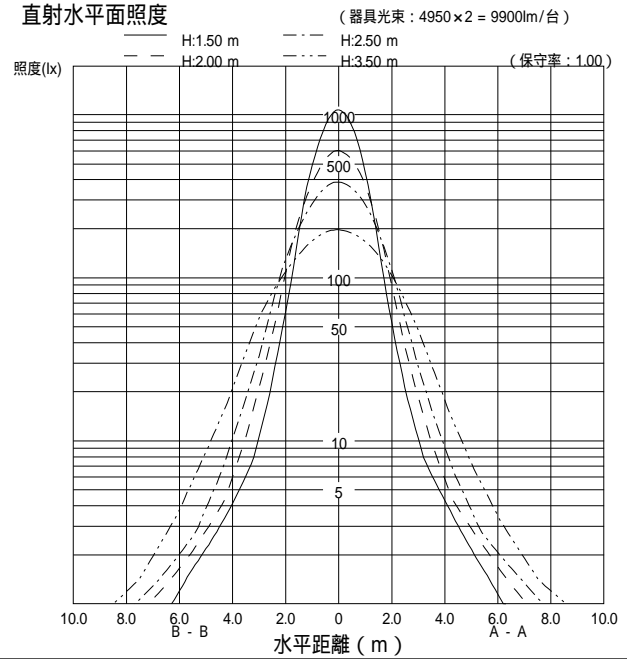

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	26	35	40	44	48	50	53	56	57	59	60	61	63
		10	24	32	36	39	43	44	46	48	49	50	51	52	52
	50	30	19	29	33	38	42	45	49	52	53	56	58	60	61
		10	19	27	31	35	39	40	43	46	47	48	49	51	51
	30	30	16	25	29	34	38	41	45	48	50	53	55	58	60
70		10	16	24	28	32	36	38	41	43	45	47	48	50	51
	10	10	13	22	25	29	34	35	39	42	43	45	47	49	50
	70	30	25	34	39	43	47	49	52	54	55	57	58	59	60
		10	24	32	35	39	42	43	46	47	48	49	50	51	52
	50	30	19	28	33	37	41	44	47	50	52	54	56	58	59
50		10	18	27	31	35	38	40	43	45	46	48	49	50	51
	30	30	16	25	29	33	38	40	44	47	49	52	54	56	58
		10	15	24	28	32	36	37	41	43	44	46	48	49	50
	10	10	13	22	25	29	33	35	39	41	43	45	47	48	50
	50	30	19	28	32	36	40	42	45	48	49	51	52	54	55
30		10	18	27	30	34	38	39	42	44	45	47	48	49	50
	30	30	16	24	28	32	37	39	42	45	47	49	51	53	54
		10	15	24	27	31	35	37	40	42	44	46	47	48	49
	10	10	13	22	25	29	33	35	38	41	42	44	46	47	49
	30	30	15	24	28	32	36	38	41	44	45	47	48	50	51
0		10	15	24	27	31	35	36	39	42	43	45	46	47	48
	0	0	13	22	25	29	33	35	38	40	42	44	45	47	48
			13	21	24	28	32	34	37	39	41	43	44	45	46