


YS4062

L4902

PX




配光曲線図 (cd/1000lm)

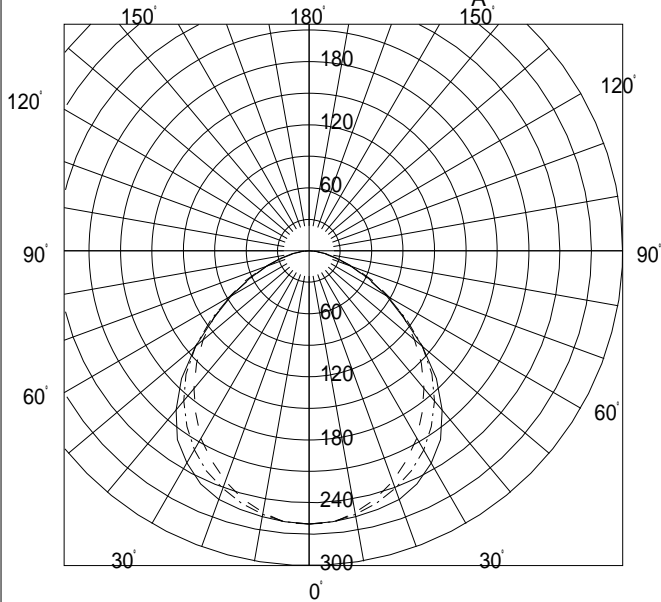

諸特性

光源		FHF32EX-NF					
最大取付間隔		A-A			B-B		
		1.37H			1.61H		
器具 効率	上方光束	0.0%					
	下方光束	65.7%					
	計	65.7%					
保守率		良	0.740	中	0.700	否	0.620

直射水平面照度

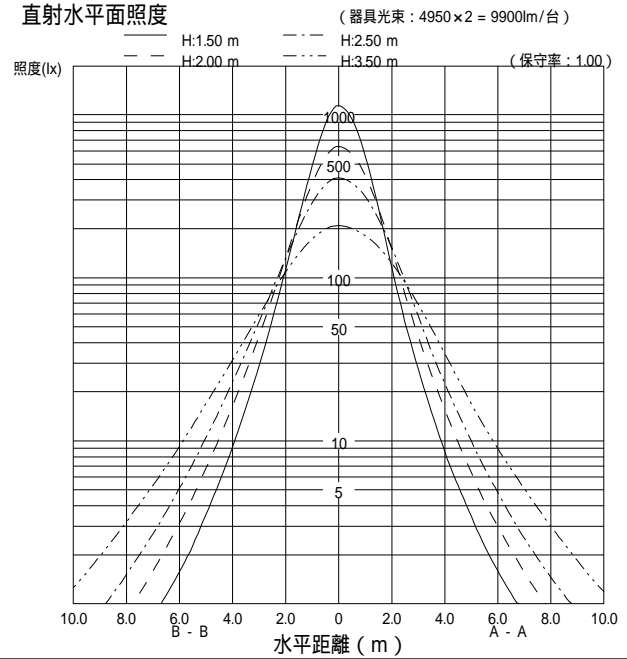

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	31	43	49	55	61	64	69	72	74	77	79	81	82
		10	29	39	45	49	54	56	60	62	64	65	67	68	69
	50	30	22	33	40	46	52	56	62	66	69	73	75	78	80
		10	21	32	37	43	48	51	55	59	60	63	64	66	68
70	30	30	17	28	34	40	47	50	57	62	65	69	72	75	78
		10	17	27	33	38	44	47	52	55	58	61	63	65	67
	10	10	14	24	29	35	40	43	49	53	55	59	61	63	66
	50	70	30	30	41	48	53	59	62	67	70	72	74	76	78
		10	28	38	44	48	53	55	59	61	63	64	66	67	68
50		30	22	33	39	45	51	55	61	65	67	70	73	75	77
		10	21	31	37	42	47	50	55	58	60	62	64	65	67
30	30	30	17	27	34	40	46	50	56	60	63	67	70	73	76
		10	17	27	32	38	43	46	51	55	57	60	62	64	66
	10	10	14	24	29	34	40	43	49	52	55	58	60	63	65
	0	50	30	21	32	38	44	49	52	58	61	63	66	68	71
		10	20	31	36	41	46	49	54	57	58	61	62	64	65
30		30	17	27	33	39	45	48	54	58	60	64	66	69	71
		10	16	26	32	37	43	46	51	54	56	59	61	63	65
30	30	30	16	27	32	38	43	47	52	55	58	61	63	65	67
		10	16	26	31	37	42	45	50	53	55	58	60	62	63
0	10	10	14	23	29	34	40	43	48	51	53	57	59	61	63
	0	0	13	22	27	33	38	41	46	50	52	55	57	59	61