



YS4062

L4932

PX




配光曲線図 (cd/1000lm)

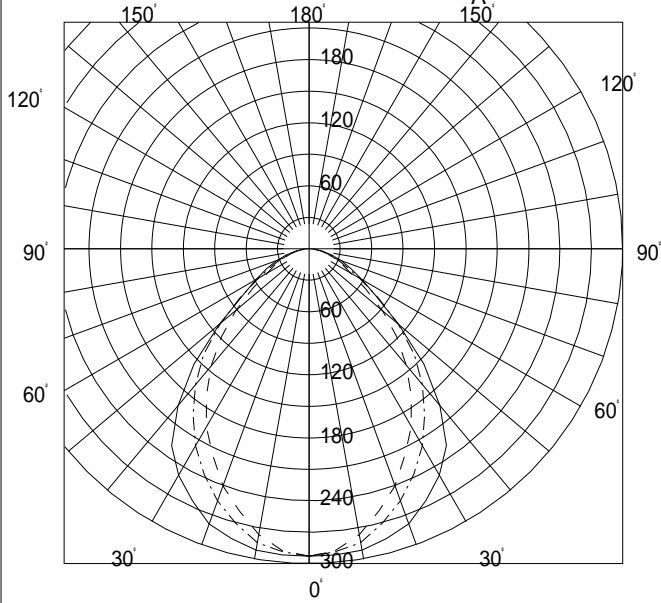

諸特性

光源		FHF32EX-NF			
最大取付間隔		A-A 1.30H		B-B 1.50H	
器具 効率	上方光束	0.0%			
	下方光束	58.0%			
	計	58.0%			
保守率		良	0.740	中	0.700 否 0.620

直射水平面照度

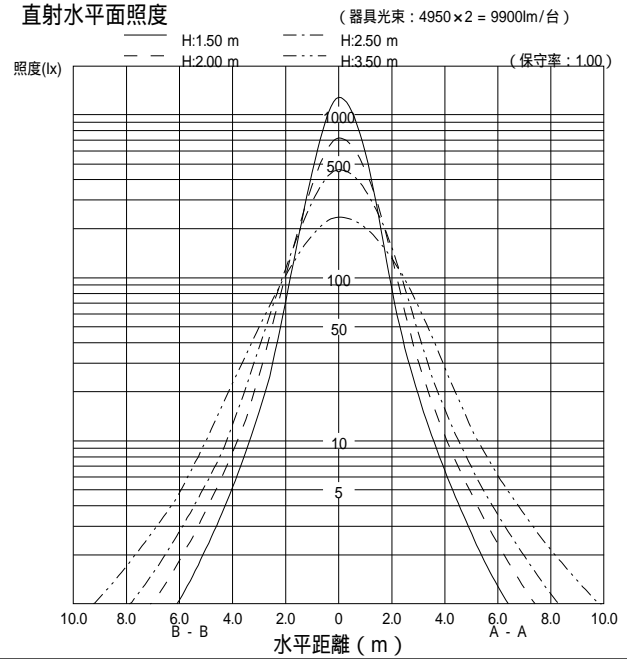

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	29	40	46	51	55	58	62	65	66	69	70	72	73
		10	27	37	41	45	49	51	54	56	57	58	59	60	61
	50	30	22	32	38	43	49	52	56	60	62	65	67	69	71
		10	21	31	36	40	45	47	50	53	54	56	58	59	60
		30	17	28	33	38	44	47	52	56	59	62	64	67	70
70	70	30	17	27	32	36	41	44	48	50	52	54	56	58	59
		10	15	24	29	33	38	41	45	48	50	53	55	57	58
	50	30	28	39	44	49	54	56	60	63	64	66	67	69	70
		10	27	36	41	45	48	50	53	55	56	57	58	59	60
		30	21	32	37	43	48	50	55	58	60	63	65	67	69
50	70	30	21	31	35	40	44	46	50	52	54	56	57	58	59
		10	17	27	31	36	41	43	47	50	52	54	56	57	59
	50	30	17	28	33	38	43	46	51	55	57	60	63	65	67
		10	17	27	31	36	41	43	47	50	52	54	56	57	59
		30	15	24	29	33	38	41	45	48	50	52	54	56	58
30	70	30	21	31	36	41	46	48	52	55	57	60	61	63	64
		10	20	30	34	39	43	45	49	51	53	54	56	57	58
	50	30	17	27	32	37	42	45	49	53	55	57	59	61	63
		10	17	27	31	36	40	43	46	49	51	53	54	56	57
		30	15	24	28	33	38	40	44	48	49	52	53	55	57
0	70	30	17	27	31	36	41	43	47	51	52	55	56	58	60
		10	17	26	31	35	40	42	46	48	50	52	54	55	56
	30	15	24	28	33	38	40	44	47	49	51	53	54	56	