


YS4062


VPH




○諸特性

光源		FHF32EX-N-H				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.03m	2.67m	3.33m	3.98m	
	B-B	2.16m	2.70m	3.30m	3.90m	
器具効率	上方光束	下方光束		計		
	0.0%	74.2%		74.2%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

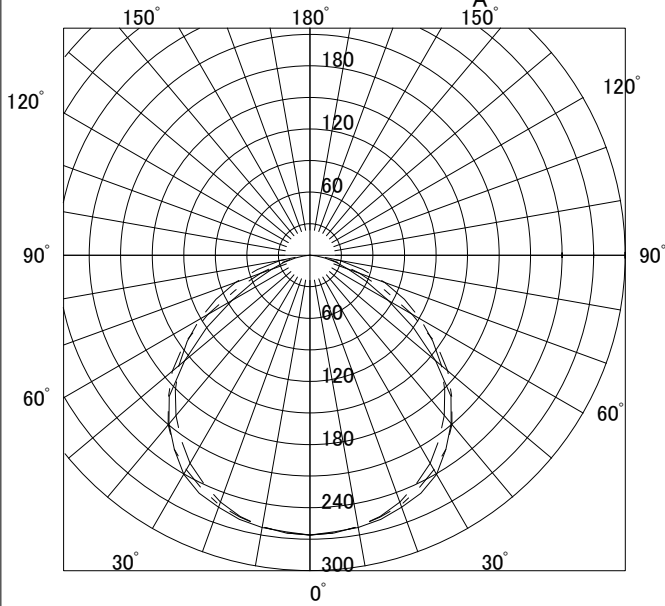

○直射水平面照度

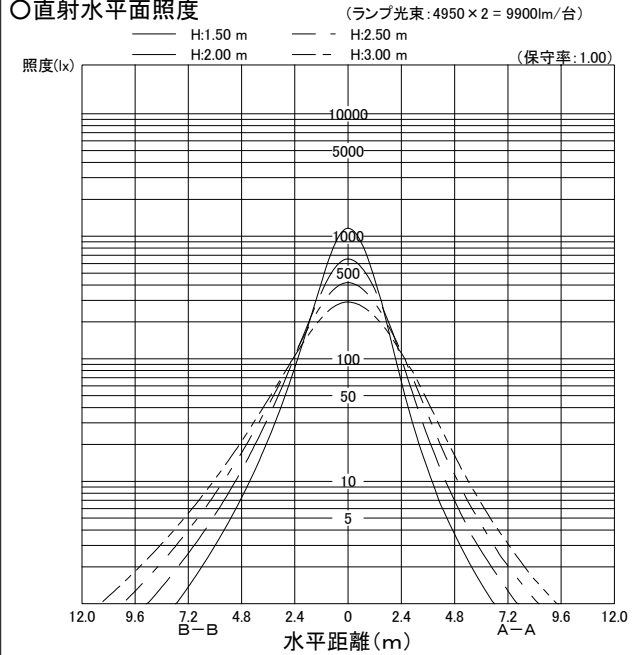

作業面照明率(×0.01)

反射率(%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	34	47	55	62	68	72	78	82	84	87	89	91	93	
		10	32	44	50	56	61	64	68	70	72	74	75	77	78	
	50	30	24	37	44	52	59	63	70	75	78	82	85	88	91	
		10	23	35	42	48	54	57	63	66	68	71	73	75	77	
70	30	30	19	30	38	45	52	56	64	69	73	78	81	86	89	
		10	18	29	36	42	49	52	58	63	65	69	71	73	75	
	50	30	33	46	54	60	66	70	75	79	81	84	86	88	90	
		10	31	43	49	54	59	62	67	69	71	73	74	76	77	
50	30	30	24	36	44	51	57	62	68	73	76	80	82	85	88	
		10	23	34	41	47	53	57	62	65	68	70	72	74	76	
	50	30	30	18	30	37	44	51	56	63	68	71	76	79	83	86
		10	18	29	36	42	48	52	58	62	65	68	70	73	75	
30	30	30	23	35	42	49	55	59	65	69	72	75	77	80	82	
		10	22	34	40	46	52	55	60	64	66	69	71	73	74	
	30	30	18	29	36	43	50	54	60	65	68	72	75	78	81	
		10	18	29	35	41	48	51	57	61	63	67	69	71	73	
0	0	30	15	25	32	38	44	48	54	58	61	65	67	70	72	
		10	15	25	31	37	44	47	53	58	60	64	66	69	71	
0	0	0	14	24	30	36	42	46	52	56	58	62	64	67	69	