



YS4062
D4092A
VPH




○諸特性

光源		FHF32EX-N-H				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.79m	2.38m	2.96m	3.55m	
	B-B	2.06m	2.60m	3.19m	3.78m	
器具効率	上方光束	0.0%		計	49.9%	
	下方光束	49.9%				
保守率	良い	0.690	普通	0.650	悪い	0.610

○配光曲線図 (cd/1000lm)

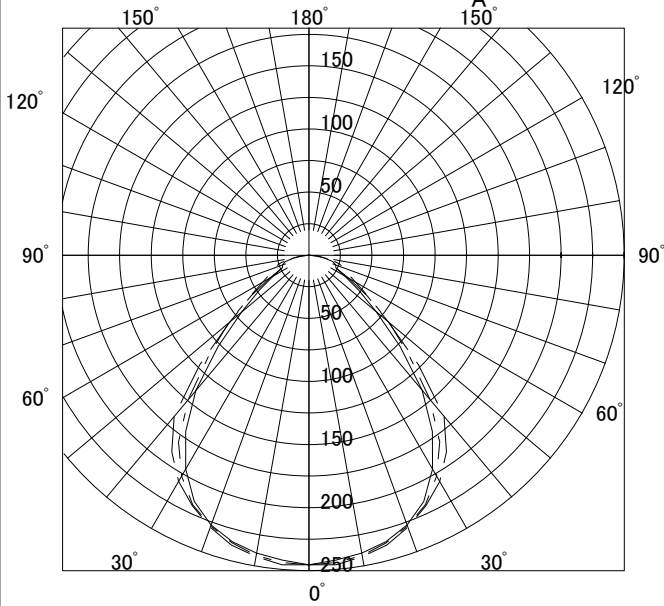

○直射水平面照度

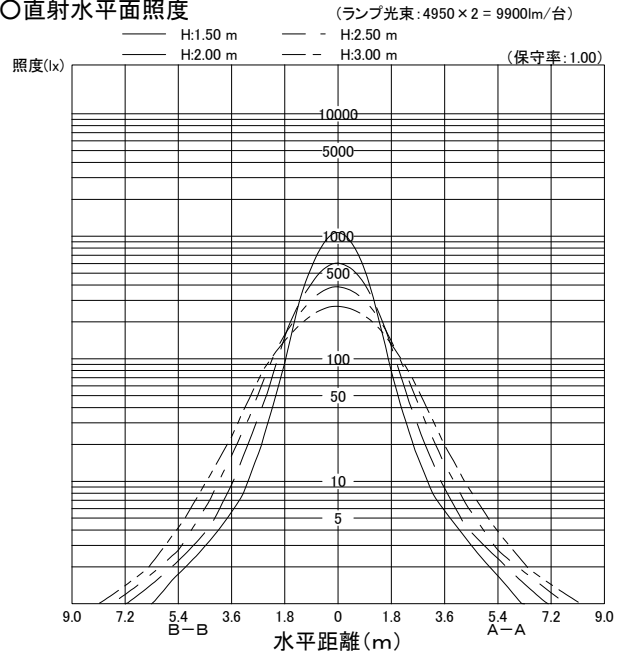

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	26	36	40	44	48	51	54	56	58	59	61	62	63
		10	24	33	37	40	43	45	47	48	49	51	51	52	53
	50	30	20	29	34	38	43	45	49	52	54	56	58	60	62
		10	19	28	32	35	39	41	44	46	47	49	50	51	52
70	30	30	16	25	30	34	39	41	45	49	51	54	56	58	60
		10	16	25	28	32	36	38	41	44	45	47	49	50	51
	10	10	14	22	26	30	34	36	39	42	44	46	47	49	51
		70	30	26	35	39	43	47	49	52	54	56	57	58	60
50	50	30	20	29	33	38	42	44	48	51	52	55	56	58	59
		10	19	28	31	35	39	41	43	46	47	48	49	51	51
	30	30	16	25	29	34	38	40	45	48	50	52	54	57	58
		10	16	25	28	32	36	38	41	44	45	47	48	50	51
30	10	10	14	22	26	30	34	36	39	42	43	46	47	49	50
		50	30	19	28	32	36	40	42	46	48	50	52	53	54
	30	30	16	25	29	33	37	39	43	46	47	50	51	53	55
		10	16	24	28	32	36	37	41	43	44	46	47	49	50
0	0	30	16	25	28	32	36	38	41	44	45	47	49	50	52
		10	14	22	26	29	33	35	38	41	42	44	46	47	48
0	0	0	13	21	25	28	32	34	37	40	41	43	44	46	47