



YS4062
L4912B
VPH



○配光曲線図 (cd/1000lm)

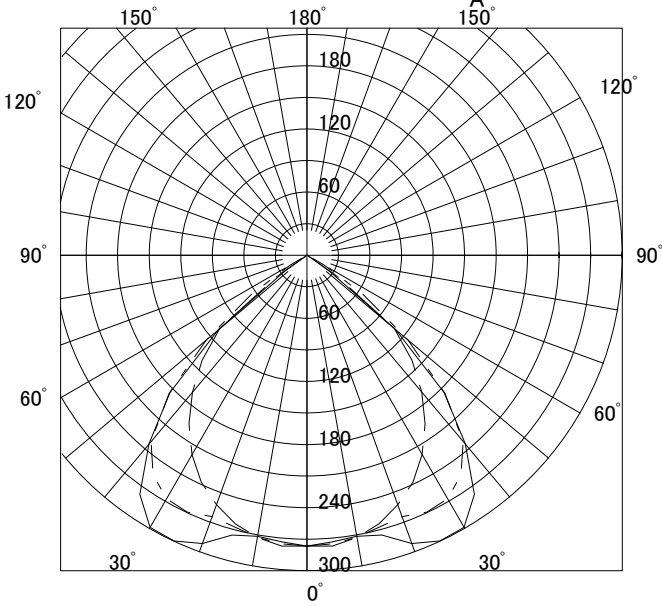


○諸特性

光源		FHF32EX-N-H					
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	2.21m	2.93m	3.65m	4.38m		
	B-B	2.00m	2.49m	3.04m	3.60m		
器具効率		上方光束	下方光束	計			
		0.0%	56.2%	56.2%			
保守率		良い	0.730	普通	0.690	悪い	0.610

○直射水平面照度

(ランプ光束: 4950 × 2 = 9900lm/台)

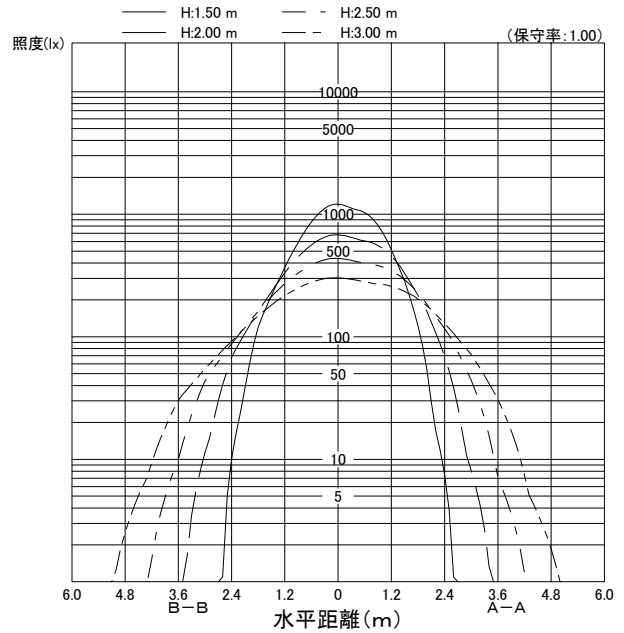

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	30	42	47	52	57	59	63	65	66	68	69	70	71
		10	28	39	43	47	51	52	55	56	57	58	58	59	60
	50	30	23	35	41	46	51	54	58	61	63	65	67	68	70
		10	23	33	38	43	47	49	52	54	55	56	57	58	59
70	30	30	19	31	36	42	47	50	54	58	60	63	64	67	68
		10	19	30	35	40	44	46	50	52	53	55	56	57	58
	10	70	30	41	46	51	56	58	61	63	64	66	67	68	69
		30	23	35	40	45	50	53	57	60	61	63	65	66	67
50	30	30	19	31	36	41	47	49	53	57	59	61	63	65	66
		10	19	30	35	39	44	46	49	52	53	55	56	57	58
	10	70	30	41	46	51	56	58	61	63	64	66	67	68	69
		30	23	35	40	45	50	53	57	60	61	63	65	66	67
30	30	30	19	30	35	40	45	48	52	55	56	58	59	61	62
		10	19	30	34	39	44	46	49	51	52	54	55	56	56
	10	70	30	41	46	51	56	58	61	63	64	66	67	68	69
		30	23	34	39	44	49	51	54	57	58	60	61	62	63
0	30	30	19	30	35	40	44	46	50	52	54	55	57	58	59
		10	19	29	34	39	43	45	48	50	51	53	54	55	55
	10	70	30	41	46	51	56	58	61	63	64	66	67	68	69
		30	23	34	39	44	49	51	54	57	58	60	61	62	63