



YS4062
L4962A
VPH




○諸特性

光源		FHF32EX-N-H				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.38m	1.82m	2.26m	2.70m	
	B-B	1.72m	2.07m	2.49m	2.91m	
器具効率	上方光束	0.0%		37.5%		
	下方光束	0.0%		37.5%		
保守率	良い	0.690	普通	0.650	悪い	0.610

○配光曲線図 (cd/1000lm)

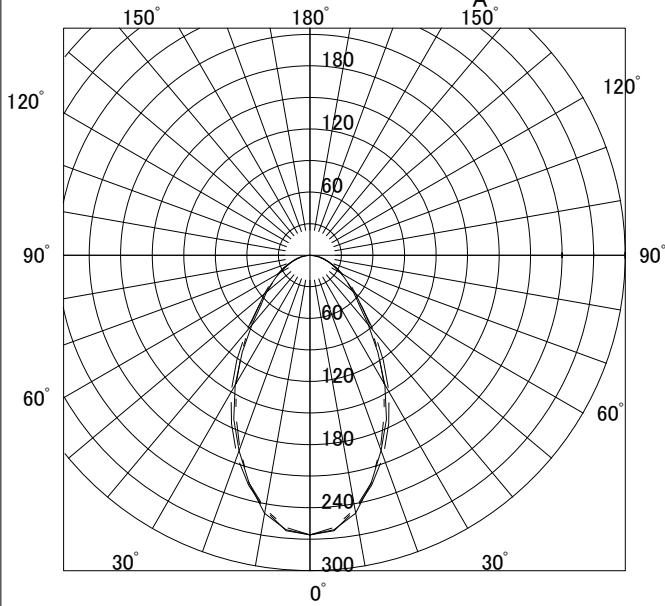

○直射水平面照度

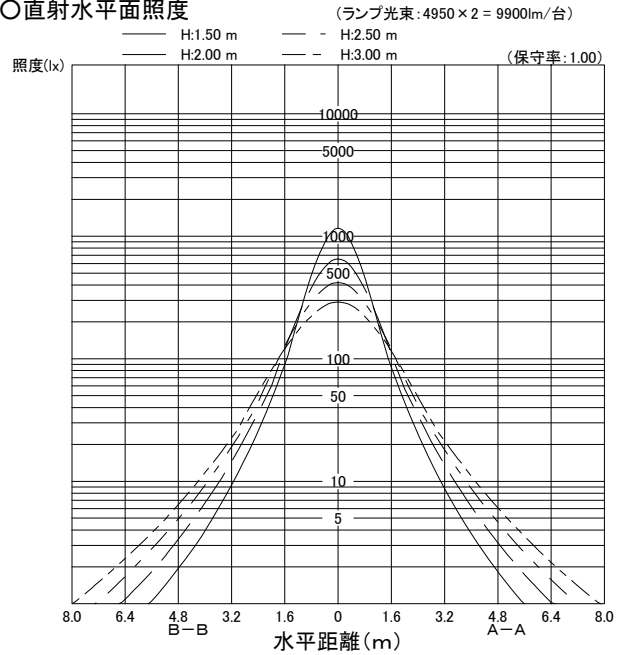

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	20	26	30	33	36	38	40	42	43	45	46	47	48
		10	18	24	28	30	32	33	35	36	37	38	39	39	40
	50	30	15	21	25	29	32	34	37	39	40	42	44	45	47
		10	14	20	24	26	29	31	33	34	35	37	38	39	39
70	30	30	12	18	22	25	28	31	34	36	38	40	42	44	46
		10	12	18	21	24	27	29	31	33	34	36	37	38	39
	10	10	11	16	19	22	25	27	30	31	33	35	36	37	38
		70	30	19	25	29	32	35	37	39	41	42	43	44	45
50	50	30	15	21	25	28	31	33	36	38	39	41	42	44	45
		10	14	20	24	26	29	30	33	34	35	36	37	38	39
	30	30	12	18	22	25	28	30	33	36	37	39	41	43	44
		10	12	17	21	24	26	28	31	33	34	35	36	37	38
30	50	30	14	20	24	27	30	32	34	36	37	39	40	41	42
		10	14	20	23	26	28	30	32	33	34	36	36	37	38
	30	30	12	18	22	24	27	29	32	34	36	37	39	40	41
		10	12	17	21	24	26	28	30	32	33	35	36	37	38
0	30	30	12	17	21	24	27	28	31	33	34	36	37	38	39
		10	12	17	21	23	26	28	30	32	33	34	35	36	37
0	10	10	10	16	19	22	24	26	29	31	32	33	34	36	37
		0	10	15	19	21	24	25	28	30	31	32	33	35	36