



	YV2001
	PH




配光曲線図 (cd/1000lm)

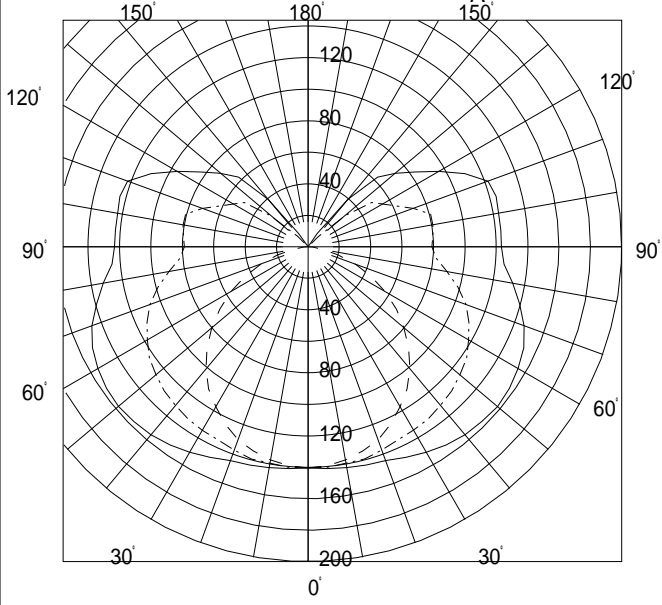

諸特性

光源		FHF16EX-N			
最大取付間隔		A-A		B-B	
		1.67H		1.34H	
器具 効率	上方光束	26.8%			
	下方光束	68.2%			
	計	95.0%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

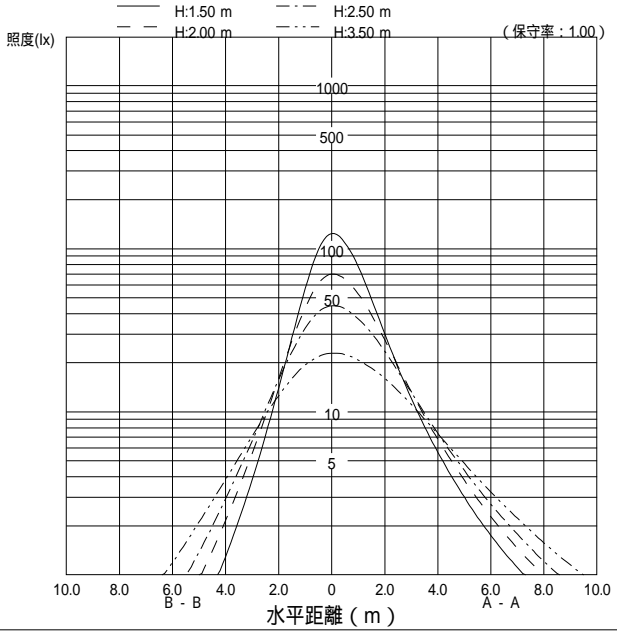

反射率 (%)		作業面照度 (× 0.01)													
		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	37	50	59	66	73	78	86	91	94	99	102	106	109
		10	35	46	53	59	65	69	74	78	81	84	86	89	91
	50	30	24	36	44	52	59	65	74	80	84	91	95	100	105
		10	23	34	42	48	54	59	66	71	74	78	81	85	88
70	30	30	17	27	35	42	49	55	64	71	76	83	89	95	100
		10	17	26	33	40	46	51	59	64	68	73	77	82	85
	70	30	35	47	55	62	68	73	80	84	88	92	95	98	101
		10	33	43	50	56	61	65	70	74	77	80	82	85	87
50	50	30	23	34	42	49	56	61	69	75	79	85	89	94	98
		10	22	32	39	46	52	56	63	67	70	75	78	81	84
	30	30	17	26	33	40	47	52	61	67	72	78	83	89	94
		10	16	25	32	38	44	49	56	61	65	70	74	78	82
30	10	10	12	20	26	32	38	43	50	56	60	66	70	75	79
	50	30	21	30	37	43	49	54	61	66	69	74	77	82	85
		10	20	29	35	41	47	50	56	61	64	68	71	74	77
	30	30	15	24	30	36	42	47	54	60	64	69	73	78	82
0	10	10	11	19	24	29	35	39	46	51	55	60	64	69	73
	30	30	13	21	27	32	38	42	48	53	56	61	64	68	72
	10	10	13	21	26	31	37	40	46	51	54	58	61	65	68
	10	10	10	17	22	27	32	36	42	47	50	55	59	63	66
	0	0	7	13	17	22	26	30	35	39	42	47	50	53	57