



YV2002	
PH	




配光曲線図 (cd/1000lm)

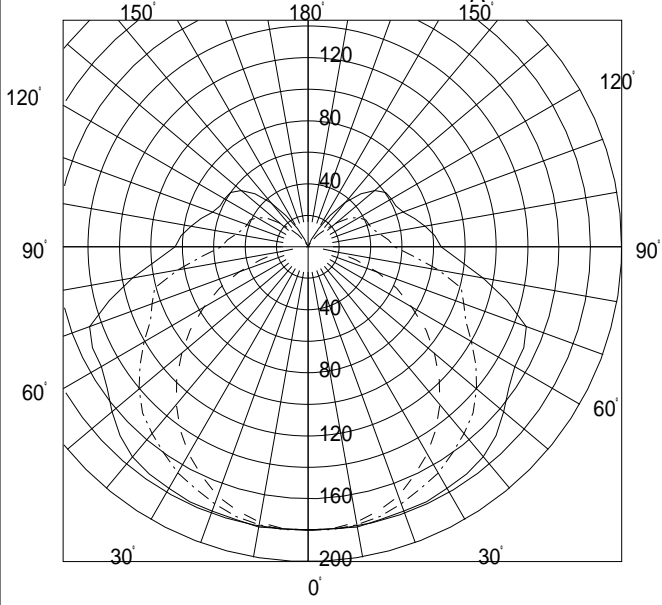

諸特性

光源		FHF16EX-N			
最大取付間隔		A-A		B-B	
		1.49H		1.34H	
器具効率	上方光束	17.7%			
	下方光束	74.1%			
	計	91.8%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

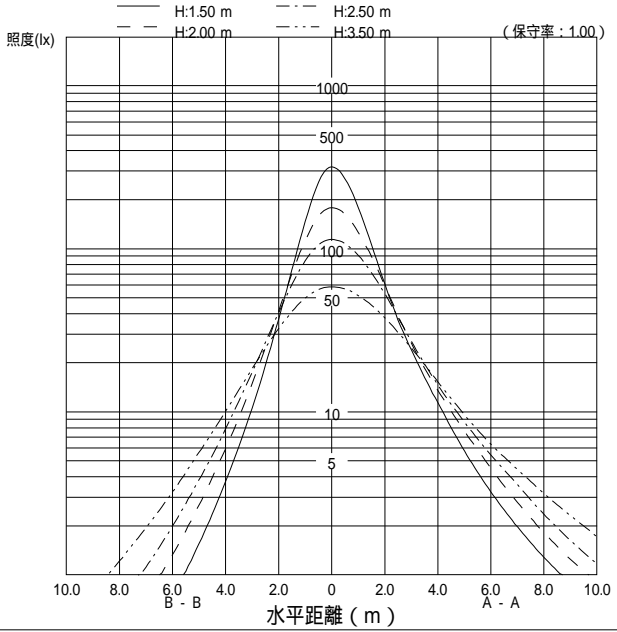

反射率 (%)		作業面照度 (× 0.01)													
		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	37	50	59	66	74	78	86	91	94	98	101	105	108
		10	35	46	54	60	65	69	74	78	80	84	86	88	90
	50	30	25	37	45	52	60	66	74	80	85	91	95	100	104
		10	24	35	42	49	55	60	66	71	74	78	81	85	88
70	30	30	18	28	36	43	51	56	65	72	77	84	89	95	100
		10	18	28	34	41	48	52	59	65	69	74	77	82	85
	50	30	35	48	56	63	69	74	81	85	88	93	95	99	101
		10	33	44	51	57	62	66	71	75	77	80	83	85	87
50	50	30	24	35	43	50	57	62	70	76	80	86	90	94	98
		10	23	34	41	47	53	57	64	68	71	76	79	82	85
	30	30	17	27	35	41	49	54	62	69	73	80	84	90	95
		10	17	27	33	39	46	50	58	63	66	71	75	79	82
30	50	30	22	32	39	46	52	57	64	69	72	77	80	84	87
		10	21	31	38	43	49	53	59	63	66	70	73	76	79
	30	30	16	26	32	38	45	50	57	63	67	72	76	81	85
		10	16	25	31	37	43	47	54	59	62	67	70	74	77
0	30	30	15	24	30	35	42	46	52	57	61	65	69	73	76
	10	10	11	20	25	30	36	40	46	51	55	60	63	67	71
0	0	0	9	16	21	26	31	35	41	45	49	53	56	60	63