


	YWL4011F
	LVPN



○配光曲線図 (cd/1000lm)

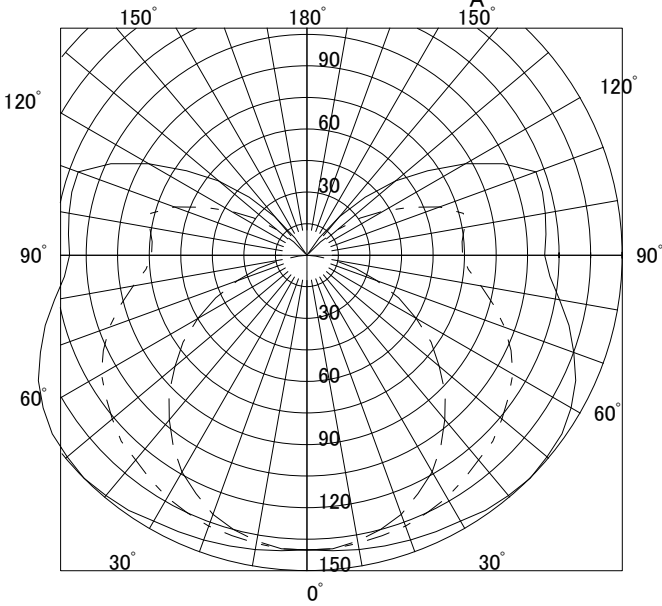


○諸特性

光源		FHF32EX-N-H				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.44m	3.19m	3.98m	4.76m	
	B-B	2.13m	2.67m	3.26m	3.85m	
器具効率	上方光束	下方光束		計		
		23.7%	65.7%	89.4%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○直射水平面照度

(ランプ光束: 3520 × 1 = 3520lm/台)

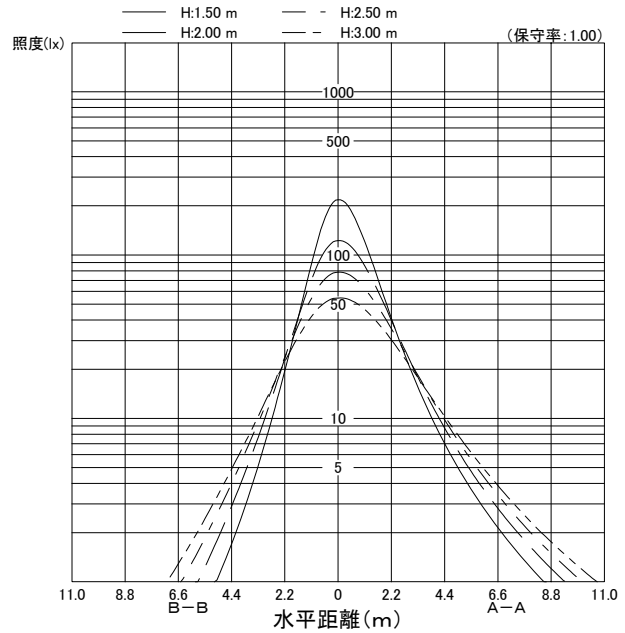

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	35	48	56	63	70	75	82	86	90	94	97	101	103
		10	33	44	51	57	62	66	71	75	77	80	82	85	86
	50	30	24	35	43	50	57	62	70	76	80	86	90	95	99
		10	23	33	40	46	52	56	63	67	70	75	78	81	84
70	30	30	17	27	34	40	47	53	61	68	73	80	84	90	96
		10	17	26	32	38	45	49	56	61	65	70	73	78	81
	10	10	13	21	27	32	39	43	50	56	60	66	70	75	79
		70	30	33	45	53	59	65	70	76	80	84	88	90	94
50	50	30	22	33	40	47	54	59	66	72	75	81	85	89	93
		10	22	31	38	44	50	54	60	64	67	71	74	78	80
	30	30	16	25	32	38	45	50	58	64	69	75	79	85	90
		10	16	25	31	37	43	47	54	59	62	67	70	75	78
30	10	10	12	20	26	31	37	41	48	54	58	63	67	72	76
		50	30	20	29	36	42	48	52	58	63	66	71	74	78
	30	10	20	28	34	40	45	49	54	58	61	65	68	71	74
		30	30	15	23	29	35	41	45	52	57	61	67	70	75
0	10	10	15	23	28	34	39	43	49	54	57	62	65	68	72
		30	30	13	21	26	31	37	41	47	51	54	59	62	66
	10	10	10	17	22	27	32	35	41	46	49	53	57	61	64
0	0	0	7	13	18	22	26	29	35	39	42	46	49	52	55