
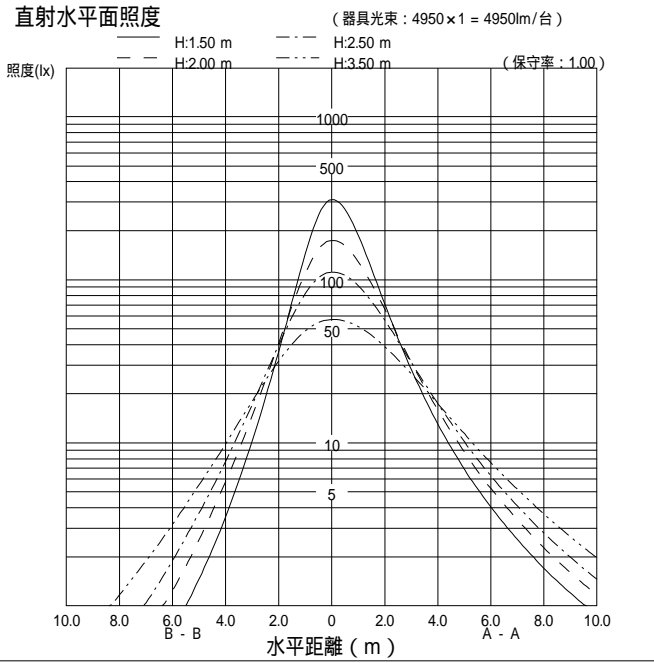


諸特性

光源		FHF32EX-N-H			
最大取付間隔		A-A		B-B	
		1.68H		1.65H	
器具 効率	上方光束	23.9%			
	下方光束	66.4%			
	計	90.3%			
保守率		良	0.730	中	0.690 否 0.610

配光曲線図 (cd/1000lm)

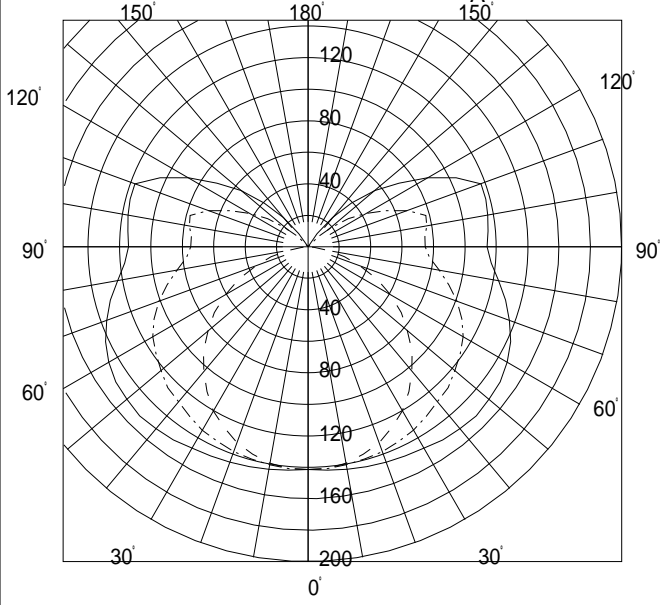

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	35	48	56	63	70	75	82	87	90	95	97	101	104
		10	33	44	51	57	62	66	71	75	77	80	82	85	87
	50	30	23	34	42	50	57	62	70	76	81	87	91	96	100
		10	23	33	40	46	52	56	63	68	71	75	78	81	84
70	30	30	17	26	33	40	47	53	61	68	73	80	85	91	96
		10	16	25	32	38	44	49	56	61	65	70	74	78	82
	10	10	12	20	26	32	38	43	50	56	60	66	70	75	79
		70	30	33	45	53	59	65	70	76	81	84	88	91	94
50		10	31	42	48	54	59	62	68	71	73	77	79	81	83
	50	30	22	33	40	47	54	59	66	72	76	81	85	90	93
		10	21	31	38	44	50	54	60	64	67	72	74	78	81
	30	30	16	25	32	38	45	50	58	64	69	75	80	85	90
30		10	16	24	31	37	43	47	54	59	62	67	71	75	78
	10	10	12	20	25	31	37	41	48	54	58	63	67	72	76
	50	30	20	29	36	42	48	52	59	63	67	71	75	78	82
		10	19	28	34	40	45	49	54	59	61	65	68	71	74
0	30	30	14	23	29	35	41	45	52	57	61	67	70	75	79
		10	14	22	28	33	39	43	49	54	57	62	65	69	72
0	10	10	11	18	23	29	34	38	45	50	53	58	62	66	70
	30	30	13	21	26	31	37	40	47	51	54	59	62	66	70
0	10	10	13	20	25	30	36	39	45	49	52	56	59	63	66
	0	0	10	17	21	26	32	35	41	46	49	54	57	61	64
0	0	0	7	13	17	21	26	29	34	39	41	46	49	52	55