


YWL8001


VPN




○諸特性

光源		FHF86EN/RX・BK				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.54m	3.24m	3.99m	4.72m	
	B-B	2.83m	3.21m	3.67m	4.21m	
器具効率	上方光束	下方光束		計		
	24.2%	70.8%		95.0%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

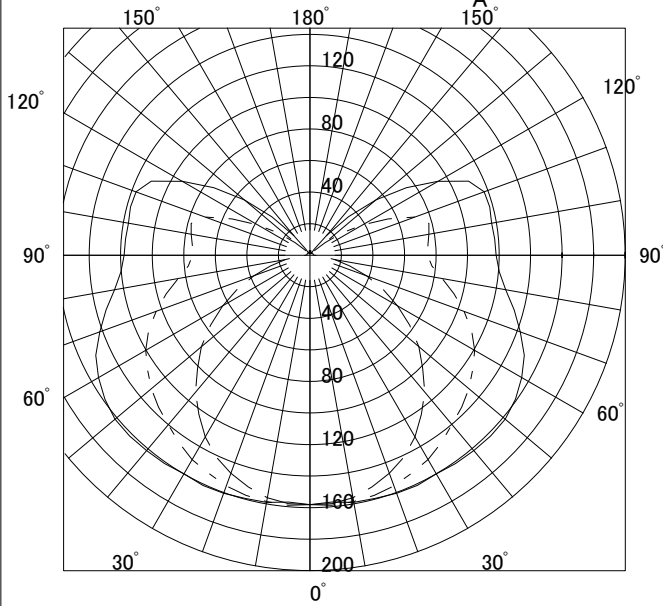

○直射水平面照度

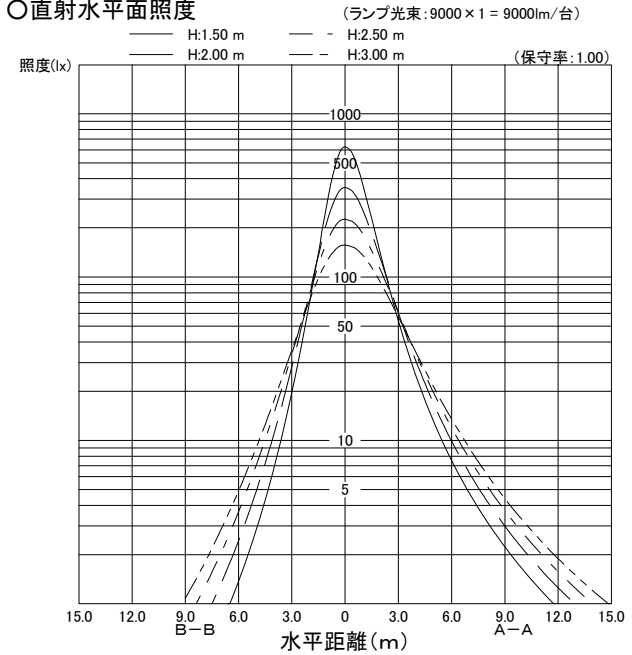

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	38	51	60	68	75	80	87	92	96	100	104	107	110
		10	36	47	55	61	67	70	76	80	82	85	88	90	92
	50	30	25	37	46	53	61	67	75	82	86	92	96	102	106
		10	24	35	43	49	56	60	67	72	75	80	83	86	89
70	30	30	18	29	36	43	51	57	66	73	78	85	90	97	102
		10	18	28	35	41	48	53	60	66	69	75	78	83	87
	10	10	14	23	29	35	42	46	54	60	64	70	74	80	84
		70	30	36	48	57	63	70	75	81	86	89	94	97	100
50	50	30	24	35	43	50	58	63	71	77	81	87	91	95	99
		10	23	34	41	47	53	58	64	69	72	76	79	83	86
	30	30	18	28	35	41	49	54	63	69	74	80	85	91	96
		10	17	27	33	40	46	51	58	63	67	72	75	80	83
30	10	10	13	22	28	34	40	45	52	58	62	68	72	77	81
		50	30	22	32	39	45	52	56	63	68	71	76	80	84
	30	10	21	31	37	43	49	52	59	63	66	70	73	76	79
		30	16	25	32	38	44	49	56	62	66	72	75	80	85
0	10	10	16	25	31	36	42	47	53	58	61	66	69	73	77
		10	12	20	26	31	37	42	48	54	57	63	66	71	75
	30	30	15	23	29	34	40	44	51	55	59	64	67	71	75
		10	14	23	28	33	39	43	49	53	56	61	64	67	71
0	0	10	11	19	24	29	35	38	45	50	53	58	61	65	69
		0	8	15	20	24	29	32	38	42	45	50	53	57	60