



○諸特性

光源		FHF32EX-N-H				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.03m	2.67m	3.32m	3.96m	
	B-B	2.16m	2.70m	3.29m	3.88m	
器具効率	上方光束	下方光束		計		
	10.4%	54.8%		65.2%		
保守率	良い	0.690	普通	0.650	悪い	0.610

○配光曲線図 (cd/1000lm)

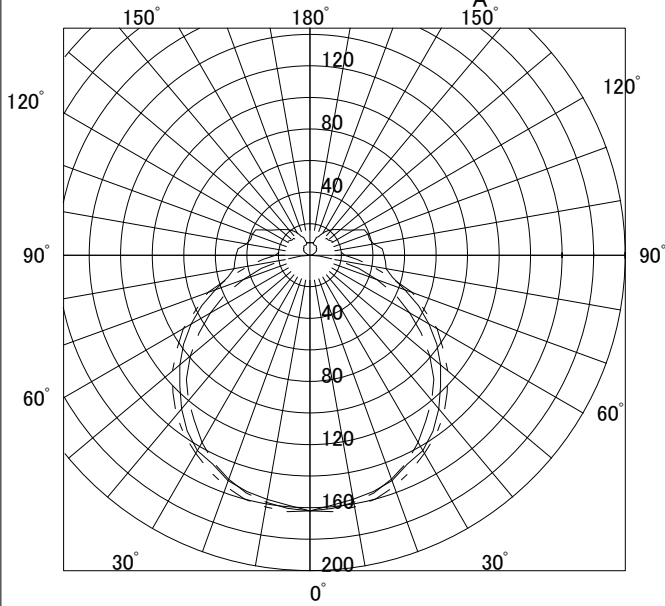

○直射水平面照度

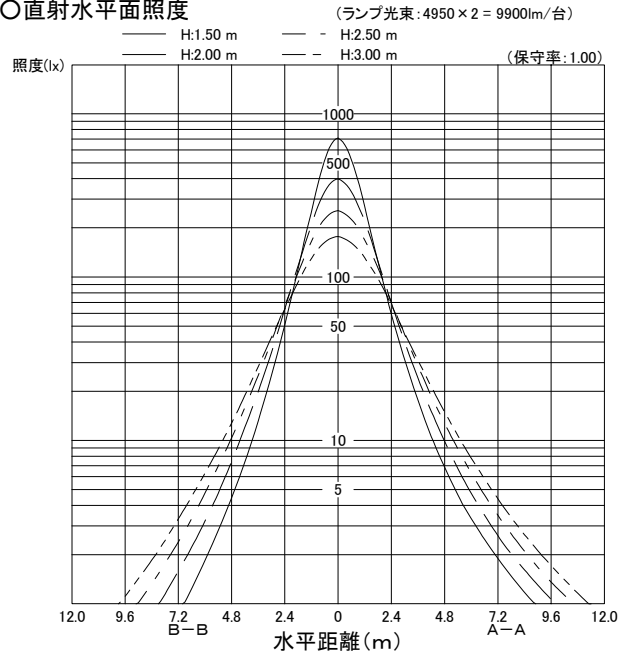

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	28	38	44	50	55	58	63	67	69	72	74	76	78
		10	26	35	40	45	49	51	55	58	59	61	63	64	65
	50	30	19	28	35	40	46	50	56	60	63	67	70	73	76
		10	18	27	32	37	42	45	50	53	55	58	60	62	64
70	30	30	14	23	28	34	39	43	50	54	58	63	66	70	73
		10	14	22	27	32	37	40	45	49	52	55	57	60	62
	10	10	11	18	23	28	33	36	42	46	48	52	55	58	61
		70	30	26	36	42	47	52	55	60	63	65	68	70	72
50	50	30	18	27	33	39	44	48	53	57	60	64	66	69	72
		10	18	26	31	36	41	44	48	51	53	56	58	60	62
	30	30	14	22	27	33	38	42	48	52	55	60	63	67	70
		10	14	21	26	31	36	39	44	48	50	54	56	59	61
30	50	30	17	26	31	36	41	44	49	52	55	58	60	63	65
		10	17	25	29	34	38	41	45	48	50	53	55	57	59
	30	30	13	21	26	31	36	39	44	48	51	55	57	61	63
		10	13	20	25	30	34	37	42	45	48	51	53	55	57
10	10	10	17	22	26	31	34	39	43	45	49	51	54	56	
	30	30	12	20	24	29	33	36	41	45	47	50	53	55	57
10	10	12	19	24	28	32	35	40	43	45	48	50	52	54	
	10	10	10	17	21	25	30	32	37	41	43	46	48	51	53
0	0	0	8	15	19	22	27	29	34	37	39	42	44	47	49