



○諸特性

光源		FHF32EX-N-H				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.54m	3.32m	4.14m	4.94m	
	B-B	2.12m	2.65m	3.24m	3.83m	
器具効率	上方光束	下方光束		計		
	26.8%	68.2%		95.0%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

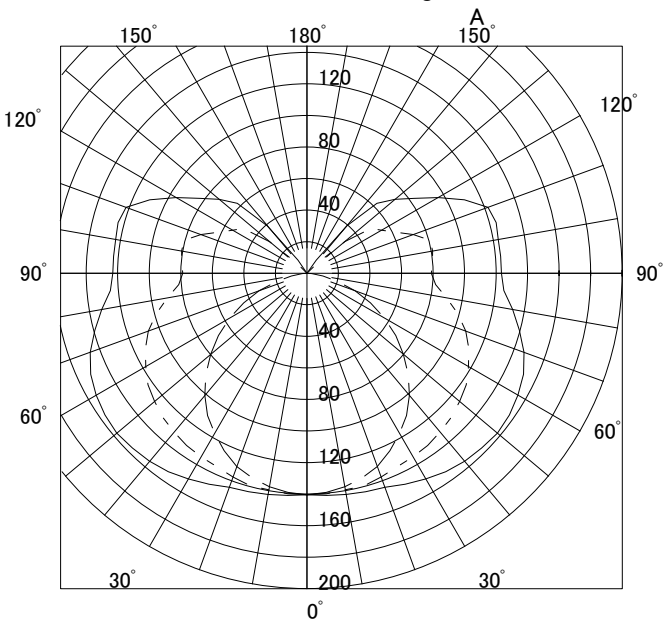

○直射水平面照度

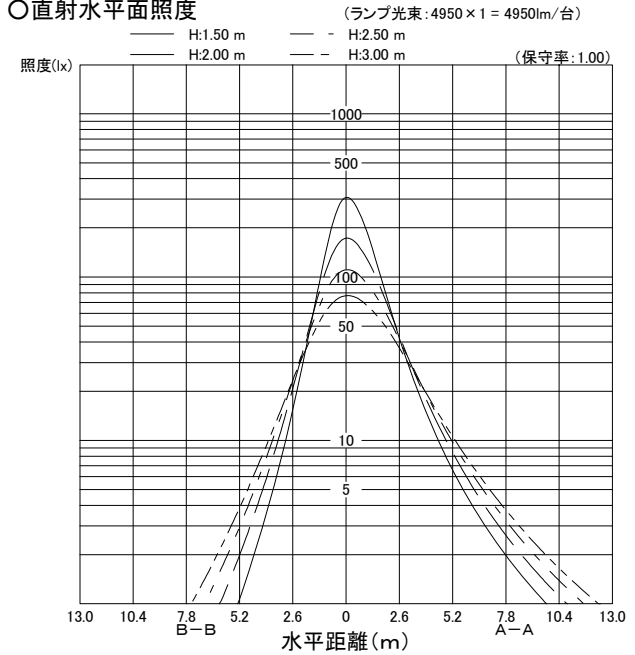

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	37	50	59	67	74	79	86	91	95	99	103	106	109
		10	35	46	54	60	66	69	75	79	81	85	87	89	91
	50	30	25	36	45	52	60	65	74	80	85	91	95	101	105
		10	24	35	42	48	55	59	66	71	74	79	82	86	89
70	30	30	18	28	35	42	50	55	65	72	77	84	89	96	101
		10	18	27	34	40	47	52	59	65	68	74	78	82	86
	10	10	13	22	28	34	41	45	53	59	63	69	73	79	83
		70	30	35	47	55	62	69	73	80	85	88	92	95	99
50	50	30	24	34	42	49	56	62	70	75	80	85	89	94	98
		10	23	33	40	46	52	56	63	68	71	75	78	82	85
	30	30	17	27	34	40	47	53	61	68	72	79	84	90	95
		10	17	26	32	38	45	49	56	62	65	71	74	79	82
30	10	10	13	21	27	33	39	43	51	57	61	66	70	76	80
		50	30	21	31	38	44	50	54	61	66	70	75	78	82
	30	10	20	30	36	41	47	51	57	61	64	68	71	74	77
		30	15	24	30	36	43	47	54	60	64	70	74	79	83
0	10	15	23	29	35	41	45	51	56	60	64	68	72	75	
		10	12	19	25	30	36	40	47	52	56	61	65	69	73
	30	30	14	22	27	32	38	42	48	53	57	61	65	69	72
		10	14	21	27	32	37	41	47	51	54	59	62	65	68
10	10	10	17	22	27	33	37	43	47	51	56	59	63	67	
	0	8	14	18	22	27	30	35	40	43	47	50	54	57	