


	YX8011
	PY



○配光曲線図 (cd/1000lm)

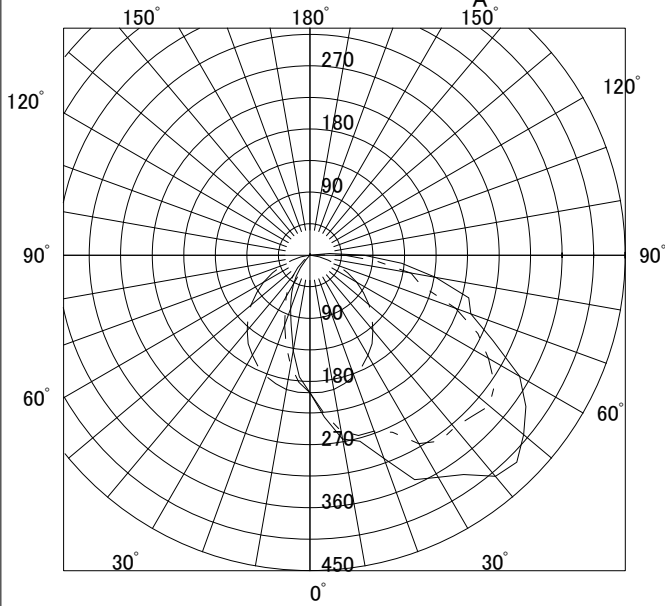


○諸特性

光源		FHF86EN/RX・BK					
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	2.42m	3.15m	3.84m	4.55m		
	B-B	2.84m	3.22m	3.68m	4.22m		
器具効率		上方光束	下方光束	計			
		1.2%	78.8%	80.0%			
保守率		良い	0.730	普通	0.690	悪い	0.610

○直射水平面照度

(ランプ光束: 9000 × 1 = 9000lm/台)

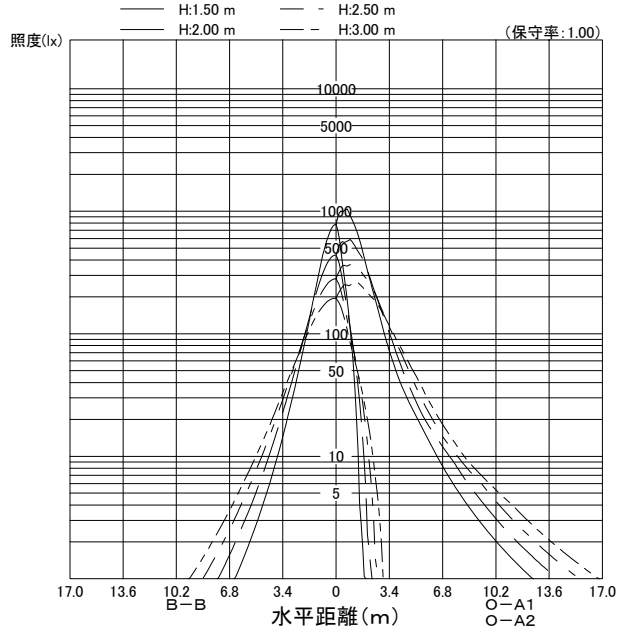

反射率(%)			作業面照明率(×0.01)												
			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	33	46	54	61	68	72	79	83	86	90	93	96	98
		10	31	42	49	55	60	64	69	72	74	77	79	81	82
	50	30	22	34	42	49	56	61	69	75	78	84	87	92	95
		10	22	32	39	45	52	56	62	66	69	73	75	78	80
70	30	30	16	26	34	40	48	53	61	67	72	78	82	88	92
		10	16	25	32	38	45	49	56	61	64	69	72	75	78
	50	30	32	45	52	59	65	70	76	80	83	87	89	92	95
		10	31	41	48	54	59	62	67	70	73	75	77	79	81
50	30	30	22	33	41	48	55	59	67	72	76	81	84	88	92
		10	21	32	38	45	51	55	61	65	68	71	74	77	79
	50	30	21	32	39	45	52	56	63	68	71	76	79	82	85
		10	20	31	37	43	49	53	59	63	66	69	72	75	77
30	30	16	25	32	38	45	50	57	63	66	72	75	80	83	
	10	15	25	31	37	43	47	54	59	62	66	69	73	76	
10	10	12	21	27	33	39	44	51	56	59	65	68	72	76	
	10	12	21	27	33	39	44	51	56	59	65	68	72	76	
30	30	15	25	31	37	44	48	55	60	63	68	71	75	78	
	10	15	24	30	36	42	46	53	57	60	65	68	71	74	
10	10	12	20	26	32	38	42	49	54	57	62	65	69	72	
	10	12	20	26	32	38	42	49	54	57	62	65	69	72	
0	0	0	10	19	24	30	36	40	47	52	55	60	63	67	70