



YX8012

PN




配光曲線図 (cd/1000lm)

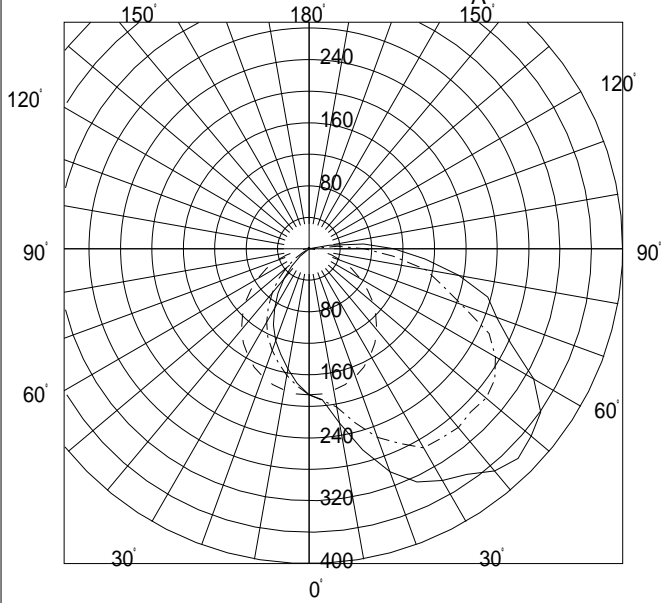

諸特性

光源		FHF86EN/RX-H			
最大取付間隔		A-A 1.85H		B-B 2.57H	
器具 効率	上方光束	2.2%			
	下方光束	78.6%			
	計	80.8%			
保守率		良	0.730	中	0.690 否 0.610

直射水平面照度

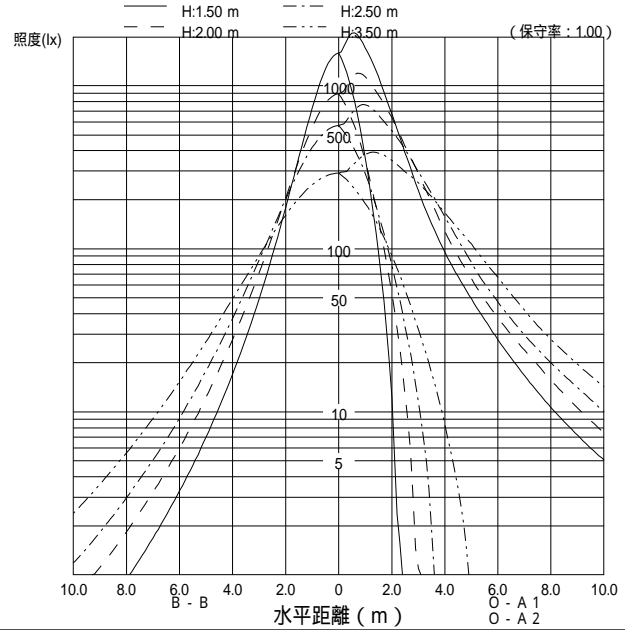

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	33	46	54	61	68	72	79	83	86	90	93	96	99
		10	31	42	49	55	60	64	69	72	74	77	79	81	82
	50	30	22	34	42	49	56	61	69	74	78	84	87	92	95
		10	21	32	39	45	51	55	61	66	69	72	75	78	80
70	30	30	16	26	33	40	48	53	61	67	71	78	82	88	92
		10	16	25	32	38	45	49	56	60	64	68	71	75	78
	10	10	12	21	27	33	39	44	51	56	60	65	68	73	76
	50	70	30	32	45	52	59	65	69	76	80	83	87	89	92
		10	30	41	48	53	59	62	67	70	72	75	77	79	81
50		30	22	33	41	47	54	59	67	72	76	81	84	88	92
		10	21	31	38	44	50	54	60	65	67	71	74	77	79
30	30	30	16	26	33	39	47	51	59	65	69	75	79	85	89
		10	15	25	32	38	44	48	55	60	63	67	70	74	77
	10	10	12	21	27	33	39	43	50	55	59	64	67	72	75
	0	50	30	21	32	39	45	52	56	63	67	71	75	78	82
		10	20	30	37	43	49	52	58	62	65	69	71	74	77
30		30	15	25	32	38	45	49	57	62	66	71	75	79	83
		10	15	25	31	37	43	47	53	58	61	66	69	72	75
0	30	30	15	24	31	37	43	47	54	59	62	67	70	74	77
		10	15	24	30	36	42	46	52	57	60	64	67	70	73
0	0	0	10	18	24	29	36	39	46	51	54	58	62	65	69