



○諸特性

光源		FHF86EN/RX・BK				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.63m	3.41m	4.18m	4.99m	
	B-B	2.85m	3.24m	3.70m	4.24m	
器具効率	上方光束	下方光束		計		
	2.2%	78.6%		80.8%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

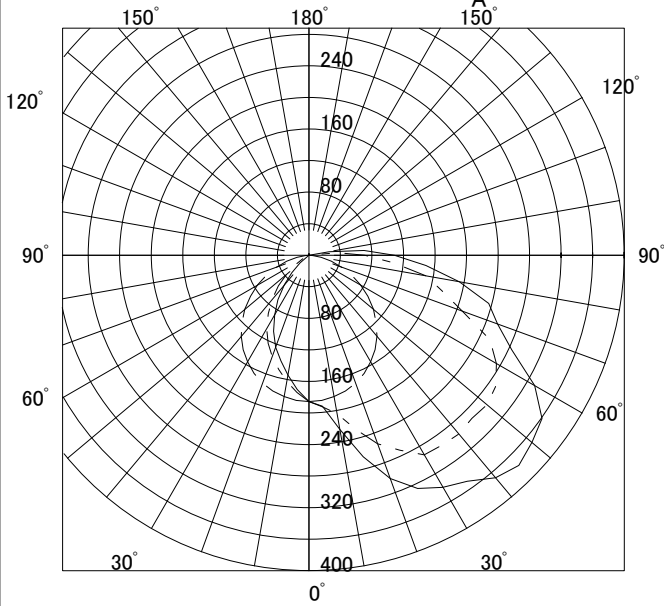

○直射水平面照度

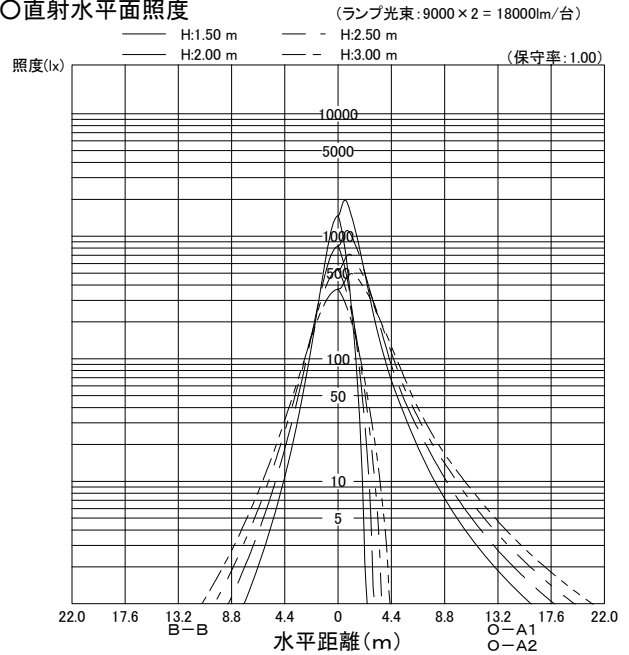

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	34	47	55	62	68	73	79	84	87	91	94	97	99
		10	32	43	50	55	61	64	69	72	75	77	79	81	83
	50	30	23	34	42	49	57	62	69	75	79	84	88	92	96
		10	22	33	40	46	52	56	62	66	69	73	75	78	81
70	30	30	16	27	34	41	48	53	61	68	72	78	83	88	93
		10	16	26	32	39	45	49	56	61	64	69	72	76	79
	10	30	12	21	27	33	40	44	51	56	60	65	69	73	77
		10	12	21	27	33	40	44	51	56	60	65	69	73	77
50	70	30	33	45	53	59	66	70	76	80	83	87	90	93	95
		10	31	42	48	54	59	63	67	71	73	76	78	80	81
	50	30	22	33	41	48	55	60	67	72	76	81	85	89	92
		10	22	32	39	45	51	55	61	65	68	72	74	77	80
30	30	30	16	26	33	40	47	52	60	66	70	76	80	85	89
		10	16	26	32	38	45	49	55	60	63	68	71	75	78
	10	30	12	21	27	33	40	44	51	56	59	64	68	72	76
		10	12	21	27	33	40	44	51	56	59	64	68	72	76
0	50	30	21	32	39	46	52	56	63	68	71	76	79	82	85
		10	21	31	37	43	49	53	59	63	66	69	72	75	77
	30	30	16	26	32	39	45	50	57	62	66	71	75	79	83
		10	16	25	31	37	43	47	54	59	62	66	69	73	75
30	30	15	25	31	37	44	48	54	59	63	68	71	75	78	
	10	15	25	31	36	42	46	52	57	60	64	67	71	73	
10	30	12	21	26	32	38	42	49	54	57	62	65	69	72	
	10	12	21	26	32	38	42	49	54	57	62	65	69	72	
0	0	0	11	19	24	30	36	40	46	51	54	59	62	66	69