


YXH4022AF


VPH



○諸特性


光源		FHF32EX-N-H(非常灯)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.11m	2.78m	3.46m	4.14m	
	B-B	2.17m	2.72m	3.33m	3.93m	
器具効率	上方光束	下方光束		計		
	0.0%	78.2%		78.2%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図 (cd/1000lm)

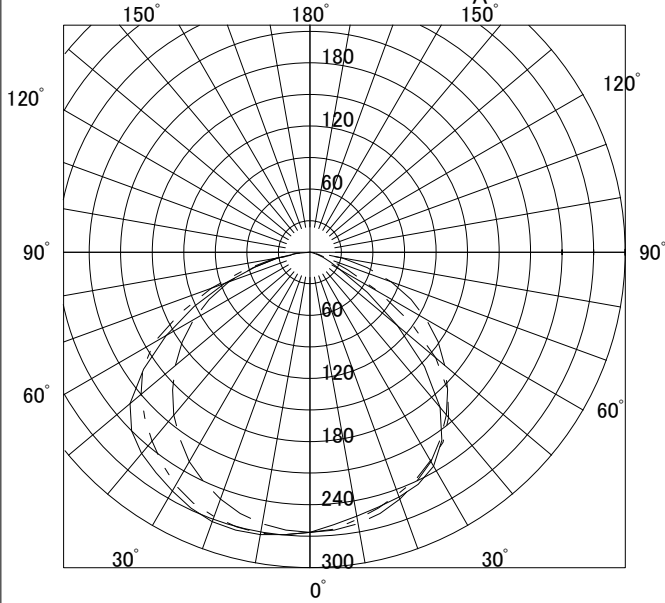

○直射水平面照度

(ランプ光束: 3520 × 2 = 7040lm/台)

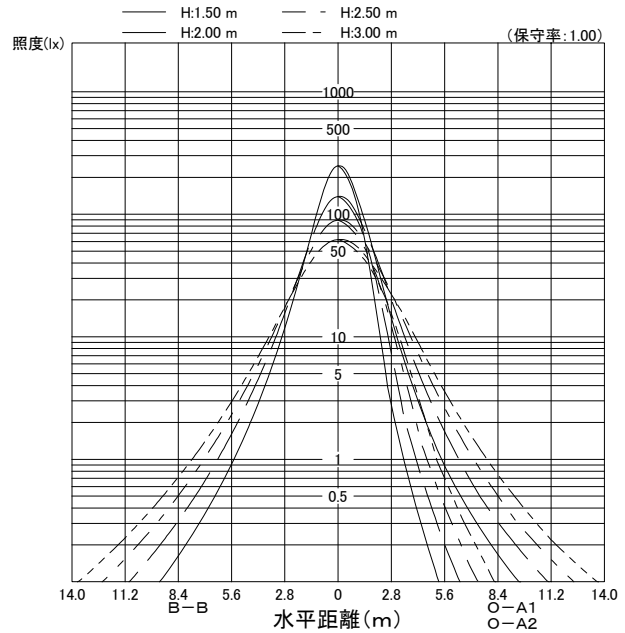

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	36	49	58	65	71	75	82	86	88	92	94	96	98
		10	33	45	52	58	63	67	71	74	76	78	79	81	82
	50	30	25	38	46	54	61	66	73	78	82	86	89	93	96
		10	24	36	43	50	56	60	65	69	72	75	77	79	81
70	30	30	19	31	39	46	54	59	67	72	76	82	85	90	93
		10	19	30	37	44	51	55	61	65	68	72	74	77	79
	10	70	15	26	33	39	46	50	57	62	65	69	72	76	78
		30	15	26	33	39	46	50	57	62	65	69	72	76	78
50	70	30	35	48	56	63	69	73	79	83	85	88	90	93	95
		10	33	44	51	57	62	65	70	73	75	77	78	80	81
	50	30	25	37	45	53	60	64	71	76	79	84	87	90	92
		10	24	36	43	49	55	59	65	68	71	74	76	78	80
30	50	30	19	31	38	46	53	58	65	71	75	80	83	87	90
		10	19	30	37	43	50	54	60	65	68	71	74	76	79
	10	70	15	26	33	39	46	50	57	62	65	69	72	75	77
		50	15	26	33	39	46	50	57	62	65	69	72	75	77
0	30	30	18	30	37	43	50	54	61	65	68	72	75	78	80
		10	18	29	36	42	49	52	58	63	65	69	71	74	76
	10	15	26	32	39	45	49	56	60	63	67	69	72	75	
0	0	0	14	24	31	37	44	47	54	58	61	65	67	70	72