


YXH4022AF

L4802F


VPH



○諸特性


光源		FHF32EX-N-H(非常灯)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.07m	2.72m	3.38m	4.05m	
	B-B	2.05m	2.54m	3.09m	3.65m	
器具効率	上方光束	下方光束		計		
	0.0%	68.6%		68.6%		
保守率	良い	0.730	普通	0.690	悪い	0.610

○配光曲線図(cd/1000lm)

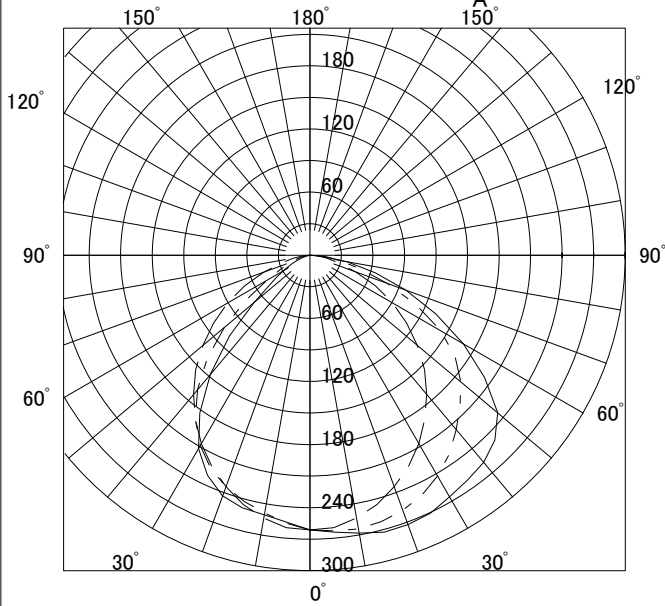

○直射水平面照度

(ランプ光束: 3520 × 2 = 7040lm/台)

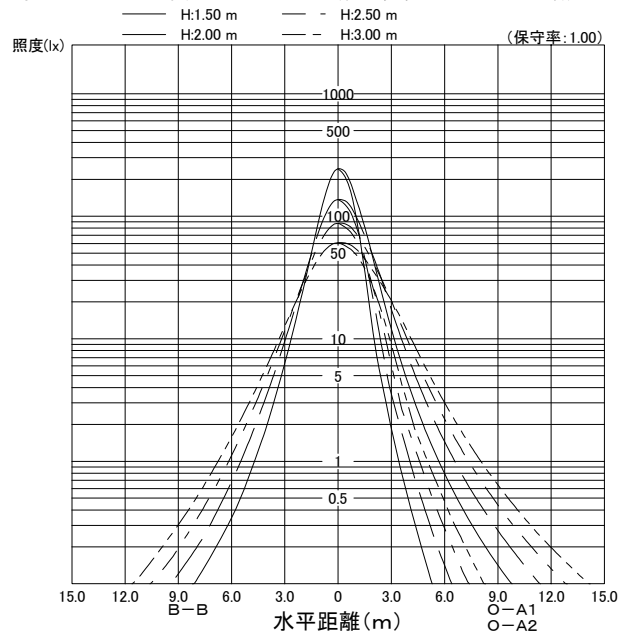

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	32	44	52	58	63	67	72	76	78	81	83	85	86
		10	30	41	47	52	56	59	63	65	67	69	70	71	72
	50	30	23	35	42	48	55	59	65	69	72	76	79	82	84
		10	22	33	39	45	50	53	58	61	63	66	68	70	71
70	30	30	18	29	35	42	49	53	59	64	68	72	75	79	82
		10	18	28	34	40	46	49	54	58	60	64	66	68	70
	10	30	15	25	30	36	42	45	51	55	58	61	64	67	69
		10	15	25	30	36	42	45	51	55	58	61	64	67	69
50	70	30	31	43	50	56	61	65	70	73	75	78	80	82	83
		10	30	40	46	51	55	58	62	64	66	68	69	70	71
	50	30	23	34	41	47	54	57	63	68	70	74	76	79	81
		10	22	33	39	44	50	53	57	61	63	65	67	69	70
30	30	30	18	29	35	41	48	52	58	63	66	70	73	77	80
		10	17	28	34	39	45	48	54	58	60	63	65	67	69
	10	30	15	25	30	36	42	45	51	55	57	61	63	66	68
		10	15	25	30	36	42	45	51	55	57	61	63	66	68
0	50	30	22	33	40	45	51	55	60	64	66	70	72	74	76
		10	21	32	38	43	48	51	56	59	61	64	65	67	69
	30	30	18	28	34	40	46	50	56	60	63	67	69	72	75
		10	17	28	33	39	45	48	53	57	59	62	64	66	68
0	30	30	14	24	30	36	41	45	50	54	57	60	62	65	67
		10	14	24	30	36	41	45	50	54	57	60	62	65	67
	10	30	17	28	34	39	45	49	54	58	60	64	66	68	70
		10	17	27	33	38	44	47	52	56	58	61	63	65	66
0	0	30	14	24	30	35	41	44	50	54	56	59	61	64	66
		10	14	24	30	35	41	44	50	54	56	59	61	64	66
0	0	13	23	28	34	40	43	48	52	54	57	60	62	64	
		13	23	28	34	40	43	48	52	54	57	60	62	64	