



YXH4022AF

VPH




配光曲線図 (cd/1000lm)

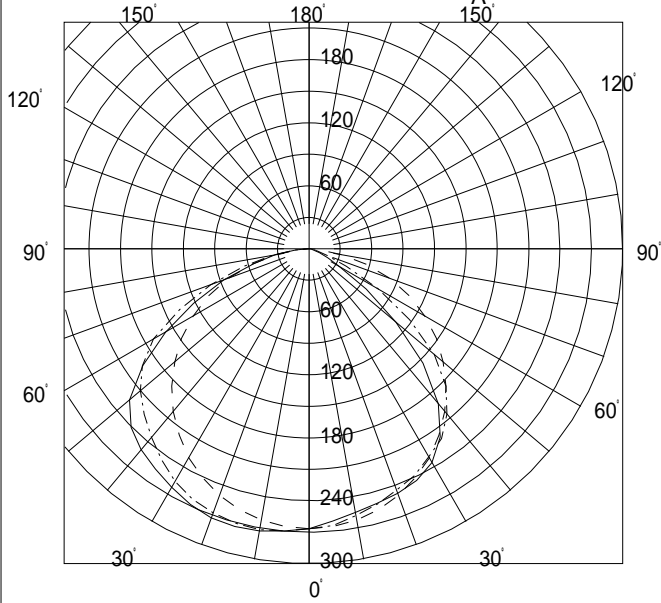

諸特性

光源		FL40SS・EX-N/37F(非常灯用)			
最大取付間隔		A-A		B-B	
		1.45H		1.67H	
器具効率	上方光束	0.0%			
	下方光束	78.2%			
	計	78.2%			
保守率		良	0.740	中	0.700 否 0.620

直射水平面照度

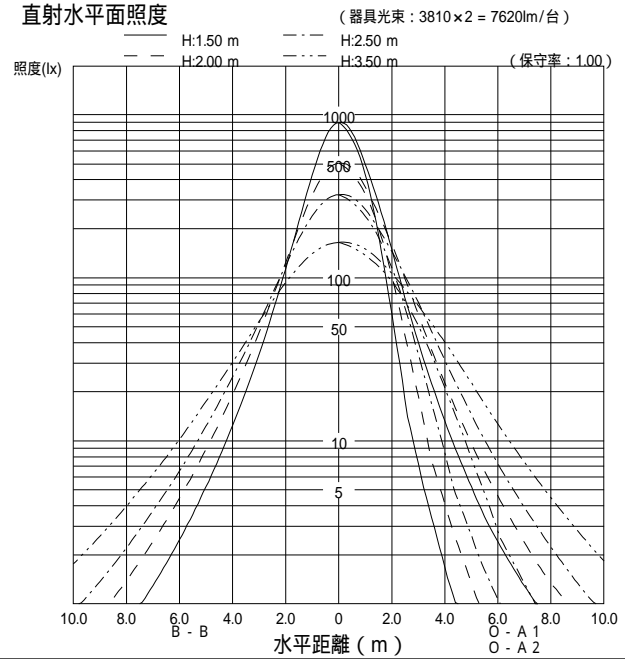

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	35	49	57	64	71	75	81	85	88	91	93	96	98
		10	33	45	52	58	63	66	70	73	75	77	79	80	82
	50	30	24	37	46	53	61	65	73	78	81	86	89	92	95
		10	24	36	43	49	56	59	65	69	71	74	76	79	80
70	30	30	19	31	38	46	53	58	66	72	76	81	85	89	93
		10	18	30	37	43	50	54	60	65	68	71	74	77	79
	10	10	15	26	32	39	46	50	57	61	65	69	72	75	78
		70	30	34	47	55	62	69	72	78	82	85	88	90	92
50		10	32	44	51	56	62	65	69	72	74	76	78	79	81
	50	30	24	37	45	52	59	64	71	76	79	83	86	89	92
		10	23	35	42	49	55	59	64	68	70	73	75	78	79
	30	30	18	30	38	45	53	57	65	70	74	79	83	87	90
30		10	18	30	36	43	50	54	60	64	67	71	73	76	78
	10	10	15	26	32	39	46	50	56	61	64	68	71	74	77
	50	30	23	36	43	50	57	61	67	72	75	78	81	84	86
		10	23	34	41	47	54	57	63	66	69	72	74	76	78
0	30	30	18	30	37	44	51	55	62	67	71	75	78	82	84
		10	18	29	36	42	49	53	59	63	66	69	72	74	77
	10	10	15	25	32	38	45	49	56	60	63	67	70	73	76
0	30	30	18	29	36	43	50	54	60	65	68	72	74	77	79
		10	18	29	35	42	48	52	58	62	65	68	70	73	75
0	0	0	13	24	30	36	43	47	53	58	61	64	67	70	72