



能力補正

【PUHY-P280M-E(-BS,-BSG)】



1. 冷房

(1) 空気条件変化による補正


① 能力・入力補正

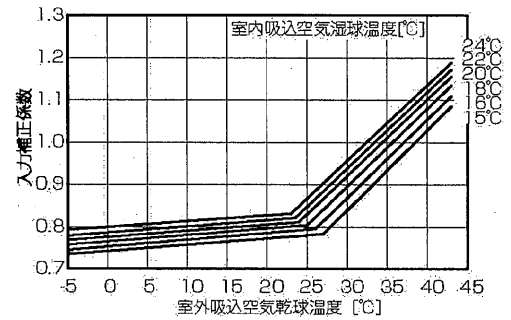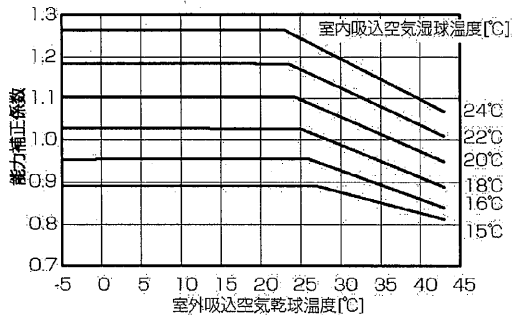

② 能力・入力補正(オールフレッシュ)

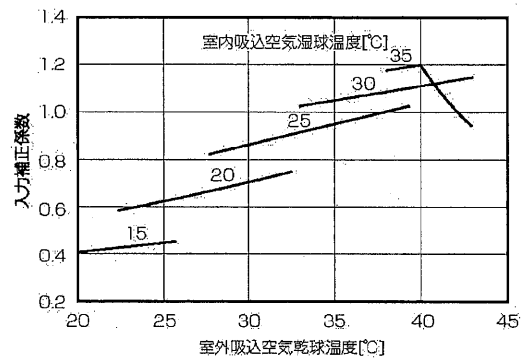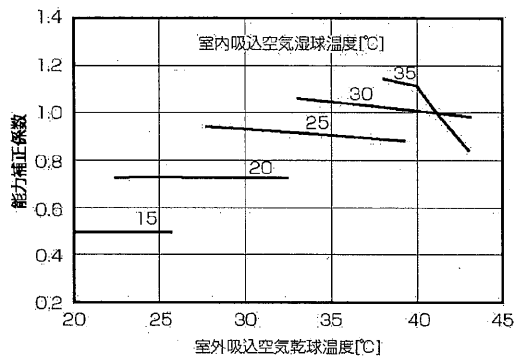

(2) 冷媒配管長補正


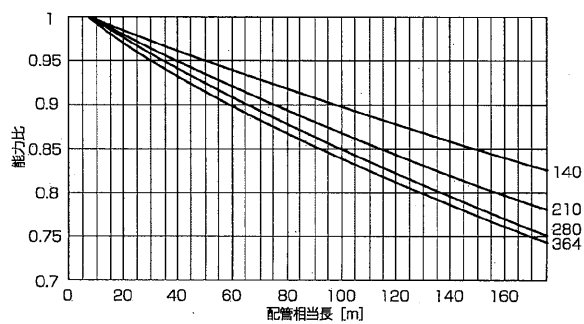


【PUHY-P280M-E(-BS,-BSG)】



1.暖房

(1) 空気条件変化による補正


① 能力・入力補正

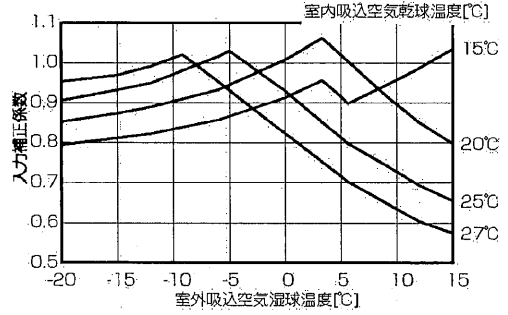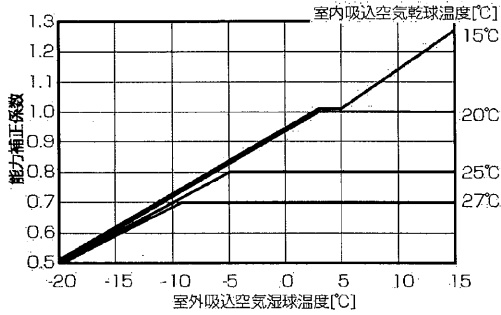

② 能力・入力補正(オールフレッシュ)

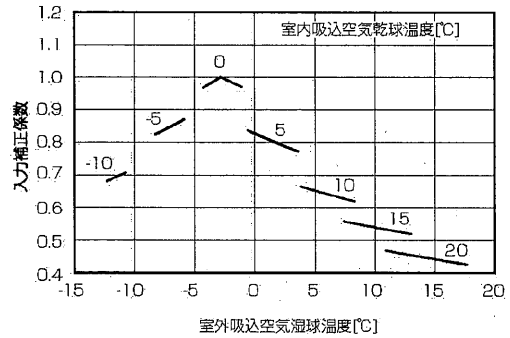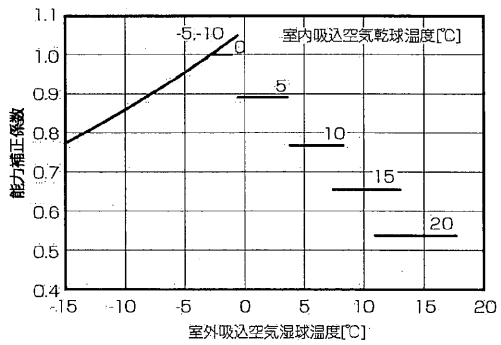

(2) 冷媒配管長補正

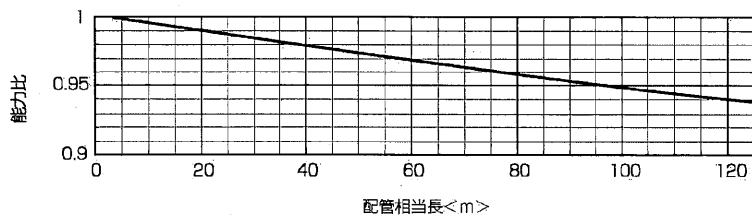

(3) 冷媒配管長補正

室外吸込空気温度 <湿球温度[°C]>		6°C	4°C	2°C	1°C	0°C	-2°C	-4°C	-6°C	-8°C	-10°C
霜取補正係数	P140 P160形	1.0	0.94	0.83	0.81	0.83	0.87	0.90	0.90	0.93	0.93
	P224 P280形	1.0	0.95	0.84	0.83	0.83	0.87	0.90	0.95	0.95	0.95