

(1) CAHV-P250AK2-H 省エネ設定時性能 湿度85%

但し35℃以上は  
WB32℃一定

■能力



		吸込空気温度 °C															
		-20	-15	-10	-7	-5	0	2	5	7	10	16	20	25	30	35	40
出口水温°C	35	—	18.6	20.2	21.1	21.2	21.3	21.4	21.7	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	45	16.0	18.7	20.3	21.2	21.3	21.5	21.5	21.8	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	55	16.1	18.8	20.4	21.3	21.4	21.6	21.6	21.8	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	60	16.1	18.9	20.5	21.4	21.5	21.6	21.7	21.8	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	65	16.1	18.9	20.5	21.4	21.5	21.7	21.7	21.9	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	70	—	—	20.6	21.5	21.6	21.7	21.8	21.9	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5

上記数値は相対湿度 RH85%時を示す


■消費電力

		吸込空気温度 °C															
		-20	-15	-10	-7	-5	0	2	5	7	10	16	20	25	30	35	40
出口水温°C	35	—	8.49	8.47	8.47	8.10	7.32	7.09	5.98	5.45	4.91	4.10	3.70	3.30	3.15	3.01	2.88
	45	9.20	9.69	9.69	9.72	9.32	8.51	8.21	7.06	6.45	5.94	5.06	4.54	4.03	3.87	3.72	3.58
	55	10.6	11.3	11.4	11.4	10.9	10.1	9.73	8.76	8.24	7.63	6.58	6.05	5.49	5.16	4.88	4.62
	60	11.4	12.2	12.4	12.5	12.1	11.1	10.7	9.52	8.89	8.30	7.33	6.78	6.20	5.78	5.42	5.10
	65	12.5	13.3	13.7	13.8	13.4	12.3	11.9	11.1	10.7	9.78	8.46	7.73	6.99	6.49	6.07	5.70
	70	—	—	15.1	15.4	14.9	13.8	13.4	12.9	12.8	12.0	10.0	8.96	7.98	7.39	6.89	6.45

上記数値は相対湿度 RH85%時を示す

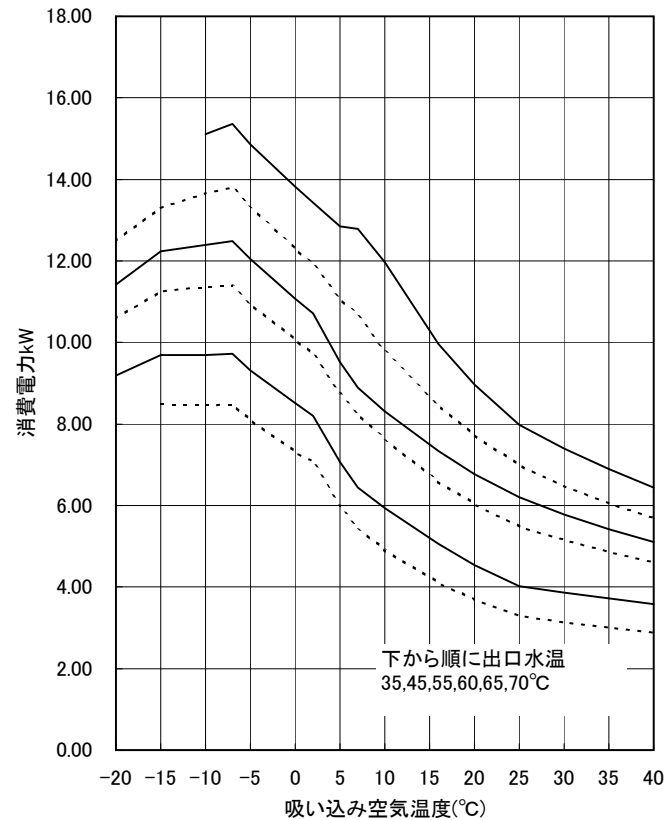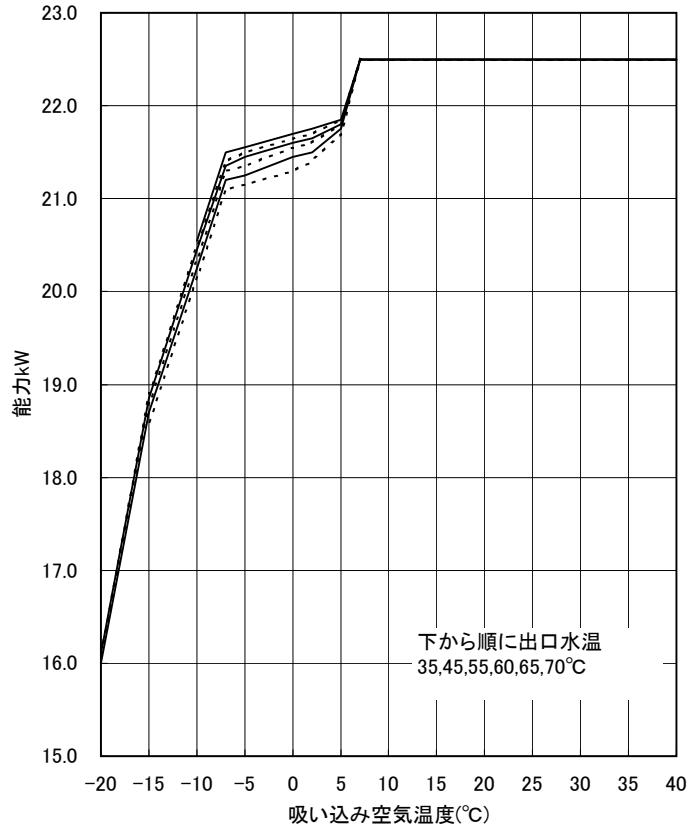

(湿度条件)

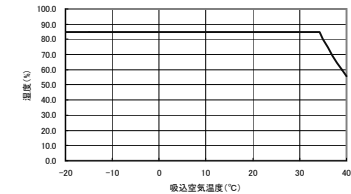



## (2)CAHV-P250AK2-H 最大能力設定時性能 湿度85%

但し35℃以上は  
WB32℃一定

## ■能力



		吸込空気温度 °C															
		-20	-15	-10	-7	-5	0	2	5	7	10	16	20	25	30	35	40
出口水温°C	35	—	18.6	20.2	21.1	21.2	21.3	22.7	24.8	31.7	32.9	35.6	36.9	37.7	36.5	35.2	34.0
	45	16.0	18.7	20.3	21.2	21.3	21.5	22.5	24.6	31.6	32.8	35.2	36.5	37.4	36.1	34.8	33.5
	55	16.1	18.8	20.4	21.3	21.4	21.6	22.3	24.4	31.4	32.9	34.8	35.7	35.5	34.6	33.7	32.9
	60	16.1	18.9	20.5	21.4	21.5	21.6	22.1	24.3	30.7	32.4	34.3	34.9	34.7	34.0	33.4	32.9
	65	16.1	18.9	20.5	21.4	21.5	21.7	21.9	24.3	30.0	31.6	33.8	34.3	33.9	33.5	33.0	32.9
	70	—	—	20.6	21.5	21.6	21.7	21.8	24.2	29.4	30.7	32.9	33.4	33.0	32.9	32.7	32.5

上記数値は相対湿度 RH85%時を示す


## ■消費電力

		吸込空気温度 °C															
		-20	-15	-10	-7	-5	0	2	5	7	10	16	20	25	30	35	40
出口水温°C	35	—	8.49	8.47	8.47	8.10	7.32	7.80	7.58	8.82	8.50	8.07	7.66	6.97	6.35	5.77	5.40
	45	9.20	9.69	9.69	9.72	9.32	8.51	8.87	8.77	10.45	10.08	9.55	9.07	8.30	7.30	6.44	5.88
	55	10.6	11.3	11.4	11.4	10.9	10.1	10.4	10.6	12.8	12.7	12.0	11.1	9.74	8.70	7.80	7.05
	60	11.4	12.2	12.4	12.5	12.1	11.1	11.3	11.7	13.9	13.9	13.3	12.1	10.6	9.50	8.57	7.81
	65	12.5	13.3	13.7	13.8	13.4	12.3	12.4	12.9	15.0	15.1	14.8	13.5	11.6	10.4	9.49	8.75
	70	—	—	15.1	15.4	14.9	13.8	13.8	14.3	16.3	16.4	16.3	14.8	12.6	11.5	10.6	9.85


上記数値は相対湿度 RH85%時を示す

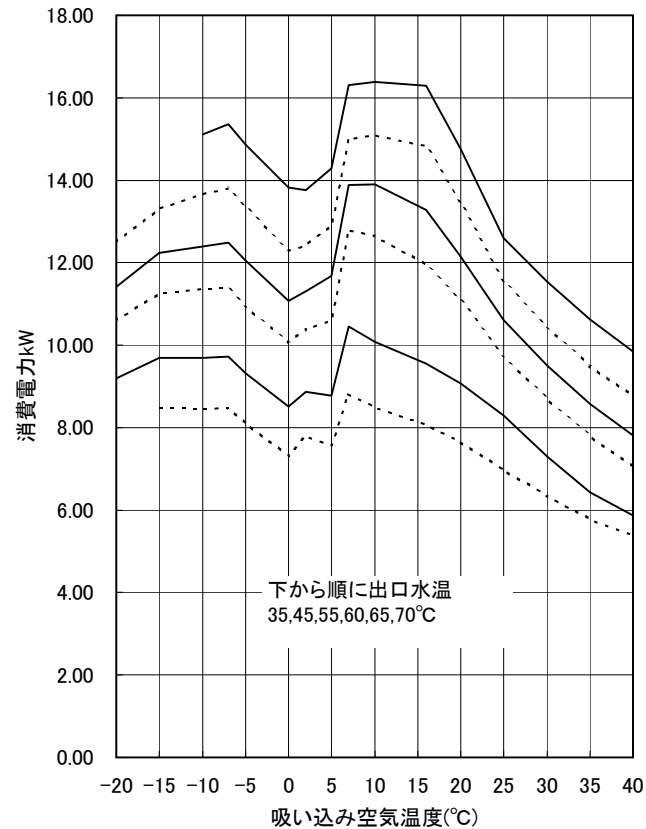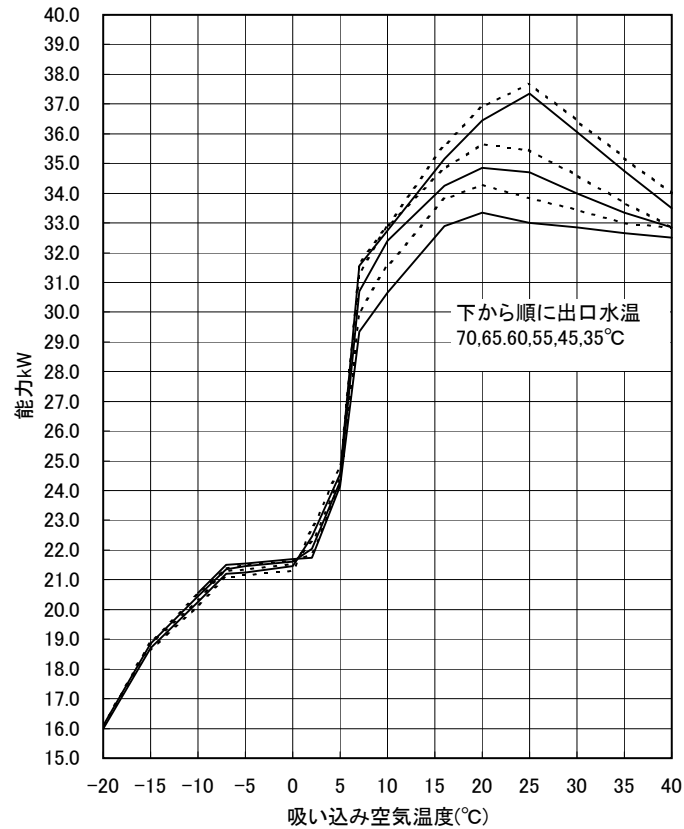

(湿度条件)



(3) CAHV-P250AK2-H 相对湿度補正線図(出口水温55°C以上)

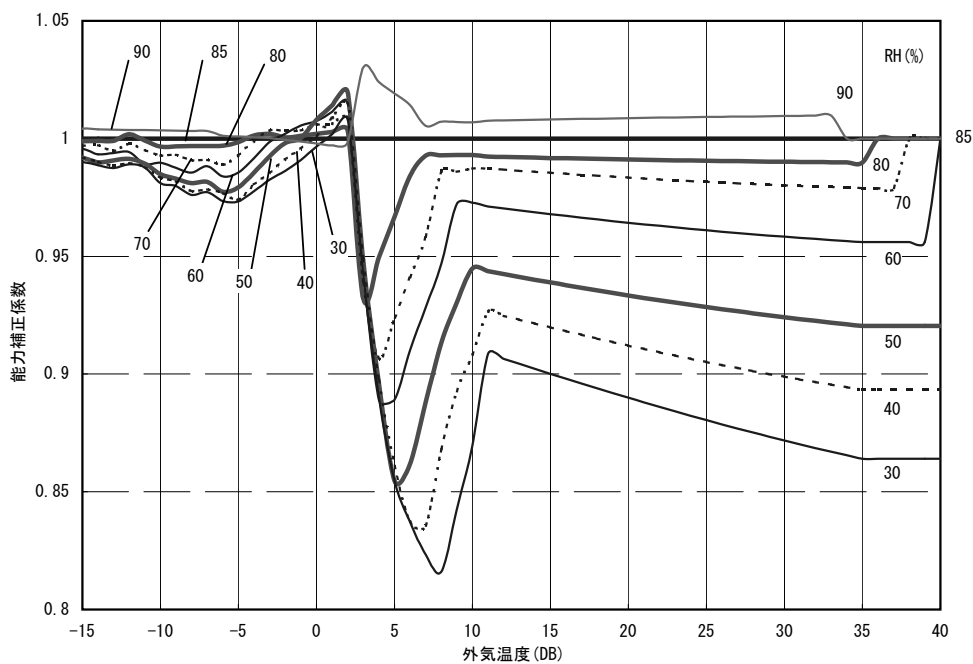

(4) CAHV-P250AK2-H 機内水压損失

