



		仕様 (測定位置等)									
測定場所		無響音室	・機外静圧 : 60(Pa) ・電源電圧(周波数) : 200V (50/60Hz)								
No.	記号	条件	63Hz	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	8000Hz	A特性
1	◆	強ノッチ	40.0	35.5	25.5	21.5	19.0	15.5	13.5	13.5	26.0
2											
3											
4											
5											

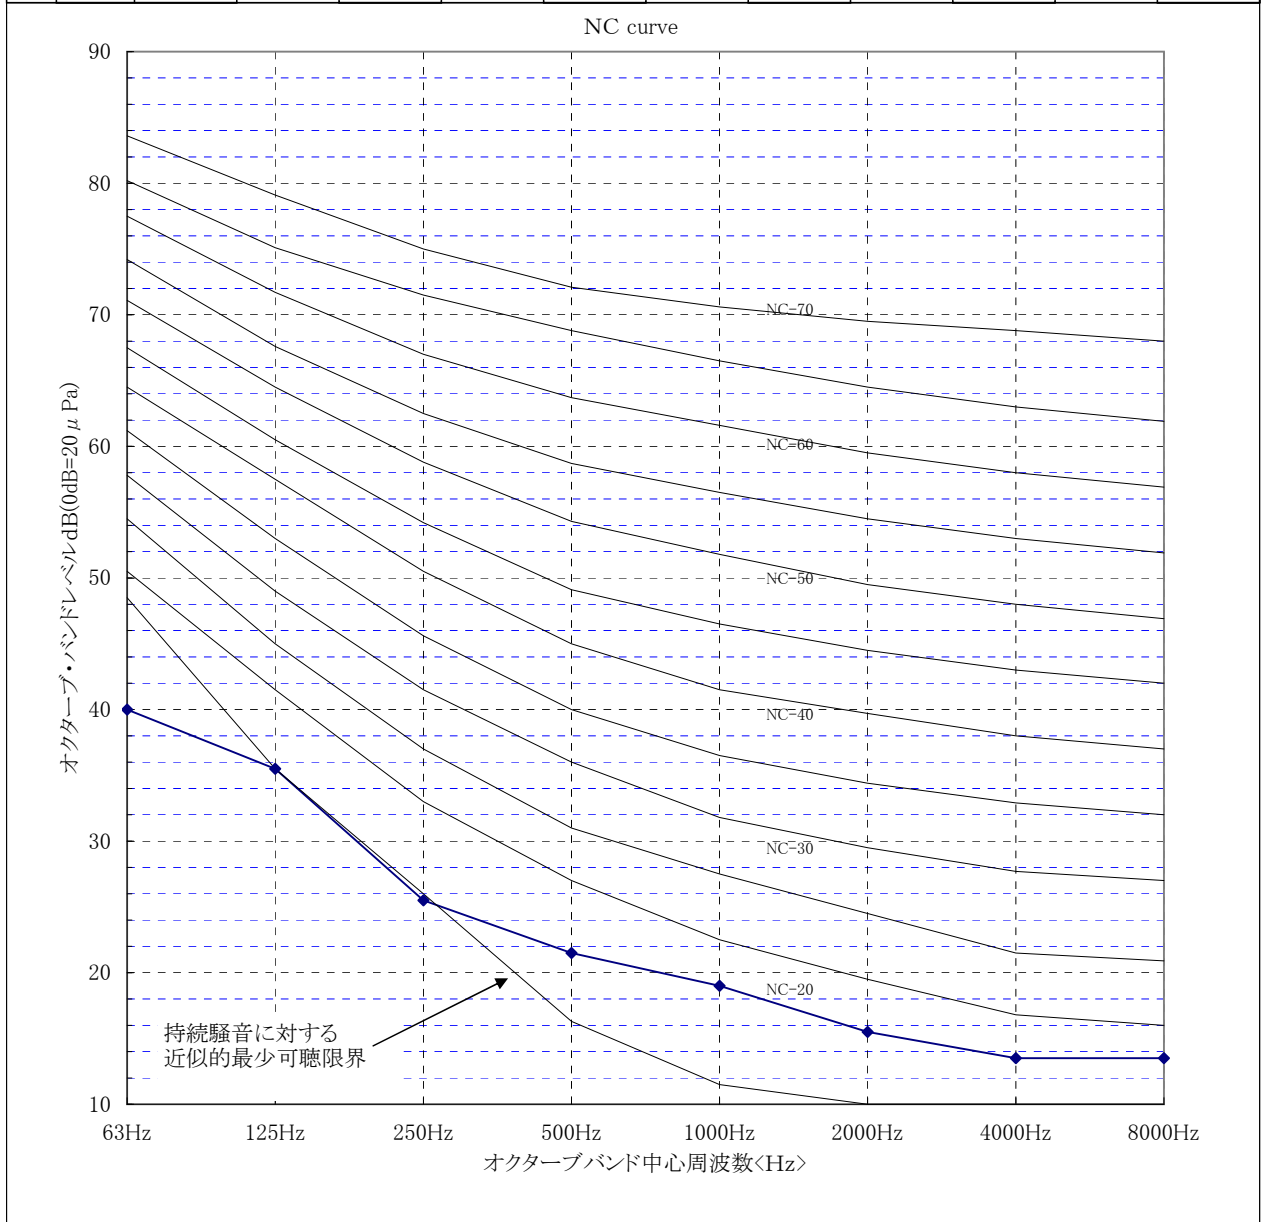

		仕様 (測定位置等)									
測定場所		無響音室 ・機外静圧 : 130(Pa) ・電源電圧(周波数) : 200V (50/60Hz)									
No.	記号	条件	63Hz	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	8000Hz	A特性
1	◆	強ノッチ	50.0	46.5	37.0	31.5	28.5	24.0	21.5	18.0	36.0
2											
3											
4											
5											

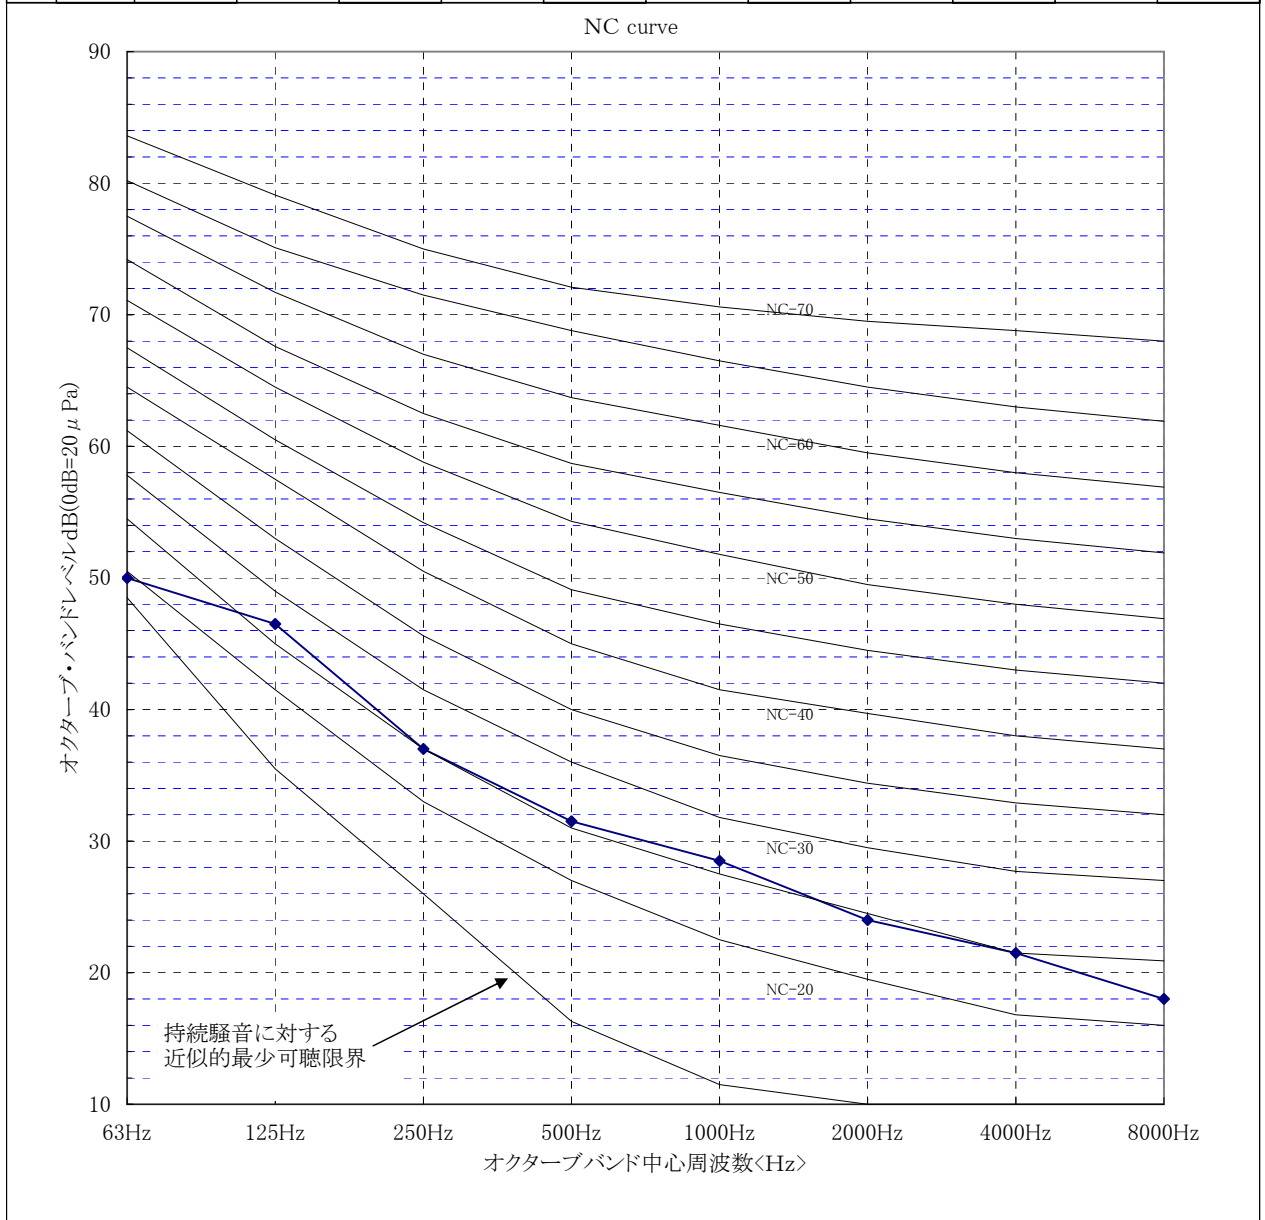

		仕様 (測定位置等)									
測定場所		無響音室	・機外静圧 : 200(Pa) ・電源電圧(周波数) : 200V (50/60Hz)								
No.	記号	条件	63Hz	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	8000Hz	A特性
1	◆	強ノッチ	55.0	51.0	42.0	36.5	33.5	30.0	27.0	23.5	41.0
2											
3											
4											
5											

