


埋込形器具 [32W2灯形] オプション取付可能タイプ - ファインベース - [埋込幅:220mm]

【照明器具の正しい使い方(安全上のご注意)】をA1~A47ページに掲載しておりますので、必ずご一読ください。

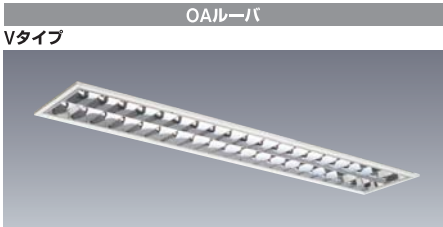

L45202


△¥ 20,300(税抜)

- ルーバ アルミ・鏡面仕上
- 質量 1.0kg

※FHF32EXのみ使用可能


YB4002F+L45202の場合

■配光曲線



■照明率表

| 反射率(%) | | 照明率(x0.01) | | | | | | | | | | | | | |
|--------|----|------------|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|------|
| 天井 | 壁 | 床 | 0.4 | 0.6 | 0.8 | 1.0 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 5.0 | 7.0 | 10.0 |
| 80 | 70 | 30 | 23 | 28 | 34 | 40 | 46 | 52 | 58 | 64 | 70 | 77 | 83 | 89 | 94 |
| | 50 | 30 | 28 | 41 | 47 | 53 | 59 | 61 | 66 | 69 | 71 | 74 | 76 | 78 | 79 |
| | 30 | 30 | 23 | 36 | 42 | 48 | 54 | 57 | 62 | 66 | 68 | 71 | 73 | 76 | 78 |
| 70 | 70 | 30 | 34 | 48 | 53 | 58 | 63 | 66 | 69 | 72 | 73 | 75 | 76 | 77 | 78 |
| | 50 | 30 | 37 | 40 | 46 | 52 | 58 | 60 | 65 | 68 | 69 | 71 | 72 | 73 | 74 |
| | 30 | 30 | 23 | 36 | 42 | 48 | 54 | 57 | 62 | 66 | 68 | 71 | 73 | 75 | 76 |
| 50 | 70 | 30 | 27 | 40 | 45 | 50 | 56 | 58 | 62 | 63 | 66 | 68 | 69 | 71 | 72 |
| | 50 | 30 | 26 | 38 | 43 | 48 | 53 | 54 | 57 | 60 | 61 | 62 | 63 | 64 | 65 |
| | 30 | 30 | 23 | 36 | 41 | 47 | 52 | 55 | 59 | 62 | 64 | 66 | 68 | 69 | 71 |
| 30 | 70 | 30 | 10 | 20 | 32 | 37 | 43 | 48 | 50 | 54 | 57 | 58 | 60 | 61 | 63 |
| | 50 | 30 | 10 | 20 | 33 | 37 | 43 | 48 | 50 | 54 | 57 | 58 | 60 | 61 | 63 |
| | 30 | 30 | 10 | 20 | 33 | 37 | 43 | 48 | 50 | 54 | 57 | 58 | 60 | 61 | 63 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

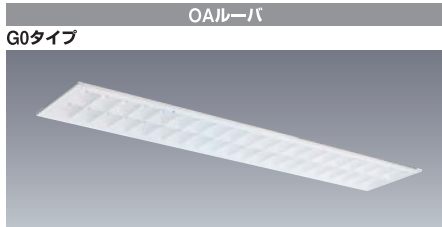

L4862A


△¥ 20,300(税抜)

- ルーバ アルミ・白色仕上
- 質量 2.0kg

※FHF32EXのみ使用可能


YB4002F+L4862Aの場合

■配光曲線



■照明率表

| 反射率(%) | | 照明率(x0.01) | | | | | | | | | | | | | |
|--------|----|------------|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|------|
| 天井 | 壁 | 床 | 0.4 | 0.6 | 0.8 | 1.0 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 5.0 | 7.0 | 10.0 |
| 80 | 70 | 30 | 25 | 34 | 38 | 42 | 46 | 48 | 51 | 54 | 57 | 58 | 60 | 61 | 63 |
| | 50 | 30 | 19 | 29 | 33 | 38 | 43 | 45 | 49 | 52 | 54 | 57 | 59 | 61 | 62 |
| | 30 | 30 | 15 | 25 | 29 | 34 | 38 | 41 | 46 | 49 | 51 | 54 | 56 | 59 | 61 |
| 70 | 70 | 30 | 28 | 39 | 43 | 47 | 49 | 52 | 55 | 58 | 59 | 60 | 61 | 62 | 64 |
| | 50 | 30 | 19 | 28 | 33 | 37 | 42 | 44 | 48 | 51 | 53 | 55 | 57 | 59 | 60 |
| | 30 | 30 | 15 | 24 | 28 | 32 | 36 | 38 | 41 | 44 | 46 | 48 | 49 | 51 | 52 |
| 50 | 70 | 30 | 18 | 27 | 31 | 35 | 39 | 41 | 44 | 46 | 47 | 49 | 50 | 51 | 52 |
| | 50 | 30 | 15 | 24 | 28 | 32 | 36 | 38 | 41 | 44 | 45 | 47 | 49 | 50 | 51 |
| | 30 | 30 | 15 | 24 | 28 | 32 | 36 | 38 | 41 | 44 | 45 | 47 | 49 | 50 | 51 |
| 30 | 70 | 30 | 10 | 18 | 22 | 27 | 31 | 35 | 37 | 41 | 43 | 45 | 46 | 48 | 49 |
| | 50 | 30 | 10 | 18 | 22 | 27 | 31 | 35 | 37 | 41 | 43 | 45 | 46 | 48 | 49 |
| | 30 | 30 | 10 | 18 | 22 | 27 | 31 | 35 | 37 | 41 | 43 | 45 | 46 | 48 | 49 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

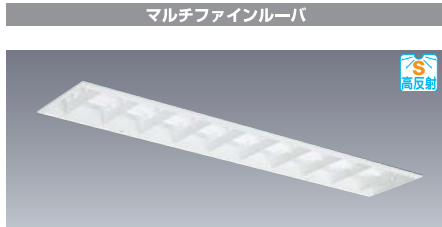

L4802F


○¥ 8,200(税抜)

- ルーバ 鋼板・白色仕上(高反射白色塗装)
- 質量 1.0kg

※FHF32EXのみ使用可能

YB4002F+L4802Fの場合

■配光曲線



■照明率表

| 反射率(%) | | 照明率(x0.01) | | | | | | | | | | | | | |
|--------|----|------------|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|------|
| 天井 | 壁 | 床 | 0.4 | 0.6 | 0.8 | 1.0 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 5.0 | 7.0 | 10.0 |
| 80 | 70 | 30 | 22 | 33 | 36 | 40 | 43 | 46 | 48 | 50 | 52 | 53 | 55 | 56 | 58 |
| | 50 | 30 | 22 | 33 | 36 | 40 | 43 | 46 | 48 | 50 | 52 | 53 | 55 | 56 | 58 |
| | 30 | 30 | 17 | 27 | 30 | 34 | 37 | 40 | 43 | 46 | 48 | 49 | 51 | 52 | 54 |
| 70 | 70 | 30 | 28 | 38 | 42 | 46 | 49 | 52 | 55 | 58 | 59 | 60 | 61 | 62 | 64 |
| | 50 | 30 | 21 | 31 | 34 | 38 | 41 | 44 | 47 | 50 | 51 | 52 | 53 | 54 | 55 |
| | 30 | 30 | 17 | 26 | 29 | 33 | 36 | 39 | 42 | 45 | 47 | 49 | 50 | 51 | 52 |
| 50 | 70 | 30 | 16 | 25 | 28 | 32 | 35 | 38 | 41 | 43 | 45 | 46 | 48 | 49 | 50 |
| | 50 | 30 | 12 | 21 | 24 | 28 | 31 | 34 | 37 | 40 | 42 | 44 | 45 | 46 | 47 |
| | 30 | 30 | 12 | 21 | 24 | 28 | 31 | 34 | 37 | 40 | 42 | 44 | 45 | 46 | 47 |
| 30 | 70 | 30 | 10 | 19 | 22 | 27 | 31 | 35 | 37 | 41 | 43 | 45 | 46 | 48 | 49 |
| | 50 | 30 | 10 | 19 | 22 | 27 | 31 | 35 | 37 | 41 | 43 | 45 | 46 | 48 | 49 |
| | 30 | 30 | 10 | 19 | 22 | 27 | 31 | 35 | 37 | 41 | 43 | 45 | 46 | 48 | 49 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |



B4332A


○¥ 8,600(税抜)

- 枠 鋼板・白色仕上
- カバー アクリル・乳白色仕上
- 質量 2.0kg

(注)非常灯には使用できません。

YB4002F+B4332Aの場合

■配光曲線



■照明率表

| 反射率(%) | | 照明率(x0.01) | | | | | | | | | | | | | |
|--------|----|------------|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|------|
| 天井 | 壁 | 床 | 0.4 | 0.6 | 0.8 | 1.0 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 5.0 | 7.0 | 10.0 |
| 80 | 70 | 30 | 19 | 27 | 31 | 35 | 39 | 41 | 44 | 46 | 48 | 50 | 51 | 52 | 53 |
| | 50 | 30 | 14 | 21 | 25 | 30 | 36 | 40 | 42 | 44 | 47 | 48 | 50 | 52 | |
| | 30 | 30 | 10 | 17 | 20 | 24 | 27 | 30 | 33 | 35 | 37 | 39 | 40 | 42 | 43 |
| 70 | 70 | 30 | 11 | 17 | 21 | 25 | 29 | 31 | 35 | 38 | 40 | 43 | 45 | 47 | 49 |
| | 50 | 30 | 10 | 16 | 20 | 24 | 28 | 30 | 34 | 37 | 39 | 41 | 42 | 43 | 44 |
| | 30 | 30 | 10 | 16 | 20 | 24 | 28 | 30 | 34 | 37 | 39 | 41 | 42 | 43 | 44 |
| 50 | 70 | 30 | 10 | 17 | 21 | 25 | 29 | 31 | 35 | 38 | 40 | 43 | 45 | 47 | 49 |
| | 50 | 30 | 10 | 17 | 21 | 25 | 29 | 31 | 35 | 38 | 40 | 43 | 45 | 47 | 49 |
| | 30 | 30 | 10 | 17 | 21 | 25 | 29 | 31 | 35 | 38 | 40 | 43 | 45 | 47 | 49 |
| 30 | 70 | 30 | 10 | 16 | 20 | 24 | 28 | 30 | 34 | 37 | 39 | 41 | 42 | 43 | 44 |
| | 50 | 30 | 10 | 16 | 20 | 24 | 28 | 30 | 34 | 37 | 39 | 41 | 42 | 43 | 44 |
| | 30 | 30 | 10 | 16 | 20 | 24 | 28 | 30 | 34 | 37 | 39 | 41 | 42 | 43 | 44 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |



D4112A

△¥ 9,400(税抜)

- 枠 鋼板・白色仕上
- カバー プリズムアクリル・透明
- 質量 2.5kg

(注)非常灯には使用できません。

YB4002F+D4112Aの場合

■配光曲線



■照明率表

| 反射率(%) | | 照明率(x0.01) | | | | | | | | | | | | | |
|--------|----|------------|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|------|
| 天井 | 壁 | 床 | 0.4 | 0.6 | 0.8 | 1.0 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 5.0 | 7.0 | 10.0 |
| 80 | 70 | 30 | 24 | 33 | 37 | 41 | 44 | 46 | 49 | 51 | 52 | 54 | 55 | 56 | 57 |
| | 50 | 30 | 18 | 26 | 30 | 33 | 37 | 40 | 43 | 45 | 46 | 48 | 49 | 50 | |
| | 30 | 30 | 15 | 23 | 27 | 30 | 34 | 36 | 39 | 41 | 43 | 45 | 46 | 47 | |
| 70 | 70 | 30 | 18 | 27 | 31 | 35 | 39 | 41 | 44 | 46 | 47 | 49 | 50 | 51 | |
| | 50 | 30 | 15 | 24 | 28 | 32 | 36 | 38 | 42 | 45 | 47 | 49 | 51 | 53 | |
| | 30 | 30 | 15 | 23 | 27 | 30 | 34 | 36 | 39 | 41 | 43 | 45 | 46 | 47 | |
| 50 | 70 | 30 | 15 | 24 | 28 | 32 | 36 | 38 | 42 | 45 | 47 | 49 | 51 | 53 | |
| | 50 | 30 | 13 | 21 | 24 | 28 | 32 | 34 | 37 | 40 | 41 | 43 | 44 | 45 | |
| | 30 | 30 | 15 | 23 | 27 | 30 | 34 | 36 | 39 | 41 | 43 | 45 | 46 | 47 | |
| 30 | 70 | 30 | 10 | 18 | 22 | 27 | 31 | 35 | 37 | 41 | 43 | 45 | 46 | 48 | |
| | 50 | 30 | 10 | 18 | 22 | 27 | 31 | 35 | 37 | 41 | 43 | 45 | 46 | 48 | |
| | 30 | 30 | 10 | 18 | 22 | 27 | 31 | 35 | 37 | 41 | 43 | 45 | 46 | 48 | |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |



L4892A

△¥ 24,400(税抜)

- 枠 鋼板・白色仕上
- ルーバ アルミ・白色仕上
- 質量 2.5kg

(注)非常灯には使用できません。