

Vタイプ

OAルーバ

L45202

△¥ 20,300(税抜)


- ルーバ アルミ・鏡面仕上
- 質量 1.0kg

※FHF32EXのみ使用可能

YX4022F+L45202の場合

照射方向 横方向 30度
縦方向 30度

■配光曲線



■照明率表

反射率(%)		照度率(×001)													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	34	47	53	59	64	66	70	72	74	76	77	78	79
	50	30	26	40	46	52	57	60	65	68	70	72	74	76	77
	30	10	25	38	43	48	53	54	58	60	61	63	64	65	65
	10	22	35	41	47	53	56	61	64	67	70	72	74	76	76
	0	10	22	34	39	44	50	52	55	58	59	61	62	64	65
70	70	30	33	46	52	57	62	64	68	70	71	73	74	75	76
	50	30	26	39	45	51	56	59	63	66	68	70	72	74	75
	30	10	25	37	42	47	52	54	57	59	61	62	63	64	65
	10	22	35	40	46	52	55	60	63	65	68	70	72	74	74
	0	10	22	34	39	44	49	51	55	58	59	61	62	63	64
50	70	30	36	48	54	59	64	66	70	71	73	74	75	76	77
	50	30	29	42	47	51	56	58	62	65	67	69	70	71	72
	30	10	25	37	42	47	51	53	56	58	61	62	63	63	63
	10	22	34	40	45	51	53	58	61	62	65	66	68	69	69
	0	10	22	34	39	44	49	51	55	58	59	61	62	63	63
30	70	30	30	42	48	54	59	63	67	71	73	74	75	76	77
	50	30	23	34	40	45	50	54	58	61	63	65	66	67	68
	30	10	19	31	36	41	46	49	52	55	57	59	60	61	62
	10	17	27	32	38	44	47	50	53	56	58	60	61	62	62
	0	10	17	27	32	38	44	47	50	53	56	58	60	61	61



L4892A


△¥ 24,400(税抜)

- 枠 鏡板・白色仕上
- ルーバ アルミ・白色仕上
- 質量 2.5kg

YX4022F+L4892Aの場合

照射方向 横方向 45度
縦方向 45度

■配光曲線




■照明率表

反射率(%)		照度率(×001)													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	19	26	30	33	36	37	40	42	43	44	45	46	47
	50	10	14	21	25	28	31	33	36	39	40	42	43	45	46
	30	10	14	21	25	28	31	33	36	39	40	42	43	45	46
	10	10	14	21	25	28	31	33	36	39	40	42	43	45	46
	0	10	11	17	21	23	26	28	31	32	34	35	36	37	38
70	70	30	15	19	22	24	26	29	31	32	34	35	37	38	38
	50	30	12	17	21	25	28	30	33	35	37	39	40	42	44
	30	10	14	20	24	28	30	33	36	39	41	42	43	45	45
	10	10	14	20	24	28	30	33	36	39	41	42	43	45	45
	0	10	11	17	21	23	26	28	31	32	34	35	36	37	38
50	70	30	11	17	21	24	27	29	32	34	35	37	38	40	41
	50	30	10	17	21	25	27	30	32	34	35	37	38	40	41
	30	10	10	15	19	23	26	29	31	32	33	35	36	37	38
	10	10	11	17	21	23	26	28	31	32	34	35	36	37	38
	0	10	11	17	21	23	26	28	31	32	34	35	36	37	38

2A=200~254V
LV=100~254V
L=100~254V 長寿命形
LA=100~242V 長寿命形

[L20] ランプ寿命20,000時間
[L24] ランプ寿命24,000時間

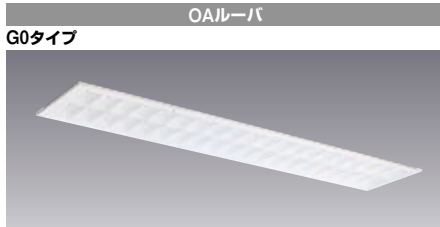

G0タイプ

OAルーバ

L4862A

△¥ 20,300(税抜)


- ルーバ アルミ・白色仕上
- 質量 2.0kg

※FHF32EXのみ使用可能

YX4022F+L4862Aの場合

照射方向 横方向 30度
縦方向 30度

■配光曲線



■照明率表

反射率(%)		照度率(×001)													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	25	36	41	45	50	52	55	58	59	61	63	64	65
	50	30	19	29	34	39	43	46	50	54	55	58	60	62	64
	30	10	19	27	32	36	40	42	45	47	49	50	51	53	54
	10	16	25	29	34	39	42	47	50	52	55	58	60	62	62
	0	10	15	24	28	32	37	39	42	45	47	49	50	52	53
70	70	30	25	35	40	44	48	50	54	56	57	59	60	62	63
	50	30	19	29	33	38	43	45	49	52	54	56	58	60	61
	30	10	18	27	31	35	39	41	45	47	48	50	51	52	53
	10	10	15	24	28	32	37	39	42	45	46	48	50	51	52
	0	10	13	22	25	30	34	36	40	43	45	47	48	50	52
50	70	30	18	28	32	37	41	43	47	50	51	53	55	56	57
	50	30	13	22	25	30	34	36	40	43	45	47	48	50	52
	30	10	18	27	31	35	39	41	46	47	49	50	51	52	52
	10	10	15	24	29	33	38	41	44	45	47	49	50	51	51
	0	10	13	22	25	30	34	36	40	42	44	46	48	49	51
30	70	30	15	24	28	32	37	39	42	45	47	49	50	52	53
	50	30	10	17	21	25	29	31	35	39	41	43	45	47	48
	30	10	10	13	17	21	25	29	31	35	39	41	43	45	46
	10	10	10	13	17	21	25	29	31	35	39	41	43	45	46
	0	0	0	12	21	24	28	33	35	38	41	42	44	46	47



B4332A

○¥ 8,600(税抜)


- 枠 鏡板・白色仕上
- カバー アクリル・乳白色仕上
- 質量 2.0kg

(注)非常灯には使用できません。

YX4022F+B4332Aの場合

照射方向 横方向 30度
縦方向 30度

■配光曲線



■照明率表

反射率(%)		照度率(×001)													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	13	19	23	27	30	33	36	39	40	42	44	45	46
	50	10	17	24	27	30	33	35	37	39	40	41	42	43	44
	30	10	13	20	23	26	30	32	35	37	38	40	41	42	43
	10	10	16	20	23	27	29	32	35	36	38	40	41	42	43
	0	10	8	14	17	21	24	27	30	33	35	37	39	40	42
70	70	30	13	19	23	27	30	33	36	39	40	42	44	45	46
	50	30	10	16	20	24	28	31	35	38	40	43	45	47	49
	30	10	13	19	23	27	30	33	36	39	40	42	44	45	46
	10	10	16	20	24	28	31	35	38	40	43	45	47	49	
	0	10	8	14	17	21	24	27	30	33	35	37	39	40	42
50	70	30	10	16	20	24	28	31	35	38	40	43	45	47	49
	50	30	10	16	20	24	28	31	35	38	40	43	45	47	49
	30	10	10	16	20	24	28	31	35	38	40	43	45	47	
	10	10	10	16	20	24	28	31							