



形名	EL-D07/2 (152NM) AHN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	0.7 H					
	B-B'	0.7 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

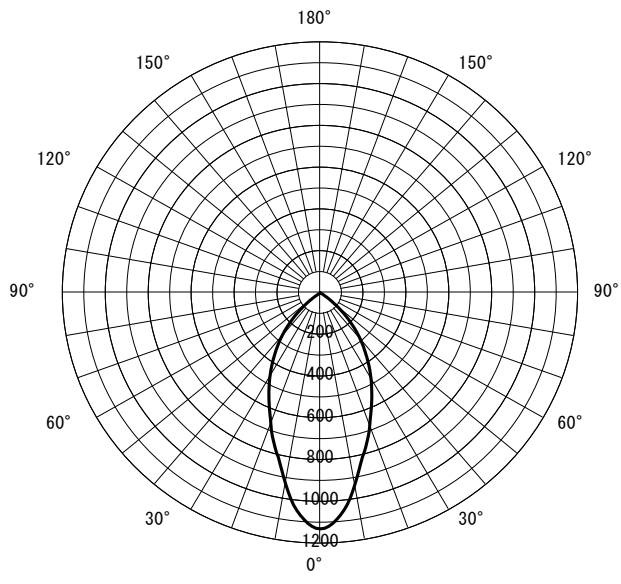

○直射水平面照度 (全光束: 1480 × 1 = 1480lm/台)

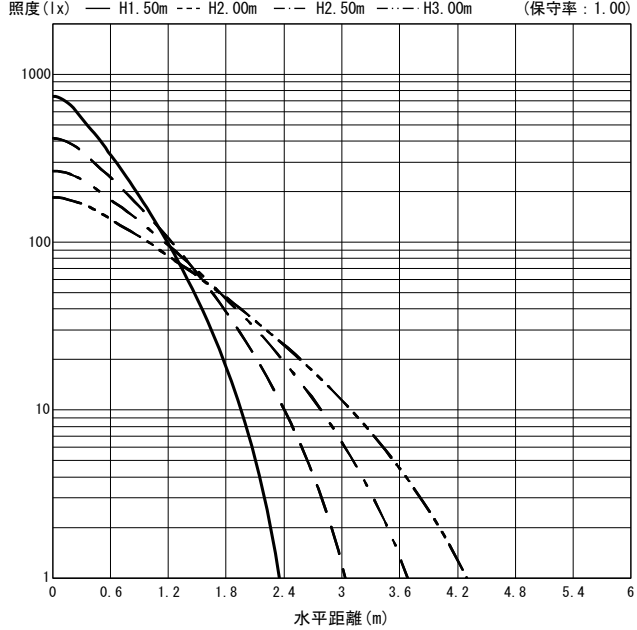

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0						
室指数	作業面照明率 (× 0.01)																																	
0.60	79	73	67	64	60	58	55	54	77	72	66	63	60	58	55	54	75	70	65	63	59	58	55	54	72	68	64	62	58	57	55	54	54	53
0.80	90	82	79	74	72	69	67	65	88	81	78	74	72	69	67	65	85	79	76	73	70	68	66	65	82	77	75	72	69	68	66	65	65	63
1.00	98	88	87	81	80	76	75	72	95	86	86	80	79	76	74	72	91	84	83	79	78	75	74	72	88	83	81	78	76	74	73	71	71	70
1.25	104	92	94	86	87	82	82	78	101	91	92	86	86	81	81	78	96	89	89	84	84	81	80	78	92	87	87	83	82	80	79	77	77	76
1.50	108	95	99	90	93	86	88	83	105	94	97	89	91	85	87	82	100	92	94	88	89	84	85	82	95	90	90	86	86	83	83	81	81	79
2.00	113	99	106	95	100	91	95	88	110	97	103	94	98	91	94	88	104	95	99	92	95	89	91	87	99	93	95	91	92	88	89	86	86	84
2.50	117	101	110	97	105	94	101	92	113	100	108	96	103	94	99	91	107	97	102	95	99	92	96	90	101	95	98	93	95	91	92	89	89	87
3.00	119	102	113	99	109	97	104	94	115	101	110	98	106	96	102	94	109	99	105	96	101	94	99	93	103	97	100	95	97	93	95	92	91	89
4.00	122	104	117	102	113	100	110	98	118	103	114	101	111	99	107	97	111	100	108	99	105	97	103	96	105	98	102	97	100	96	98	94	94	92
5.00	124	105	120	103	117	101	113	100	120	104	116	102	113	100	111	99	112	102	110	100	107	99	105	98	106	99	104	98	102	97	101	96	95	94
7.00	126	106	123	105	120	103	118	102	122	105	119	104	117	102	115	101	114	103	112	102	110	101	109	100	107	101	106	100	104	99	103	98	97	95
10.00	128	107	126	106	124	105	122	104	123	106	121	105	120	104	118	103	115	104	114	103	112	102	111	101	108	101	107	101	106	100	105	100	99	97

JIS C 8030:2014

三菱電機照明株式会社