


形名	EL-LF-VH4111A/2 AHN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1			通常時	
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40T-N/17/25-G3					
最大 取付 間隔	高さ	H					
	A-A'	0.8 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		22.3%	53.8%	76.1%			
保守率		良い	0.880	普通	0.860	悪い	0.810

○配光曲線図 (cd/1000lm)

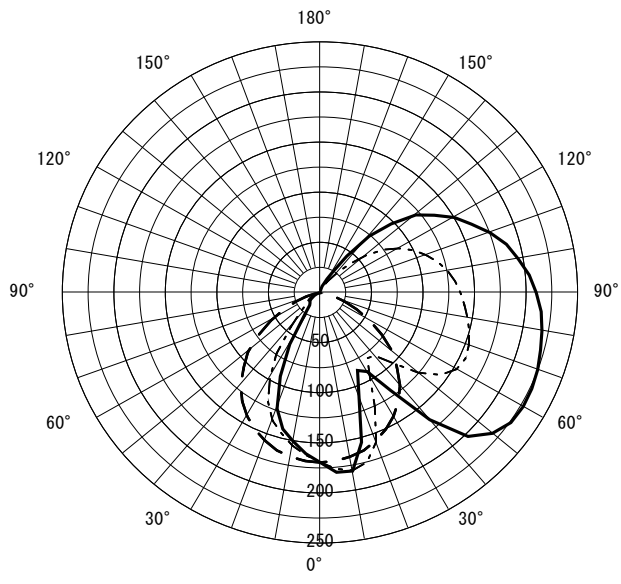

○直射水平面照度 (全光束: 2500 × 1 = 2500lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

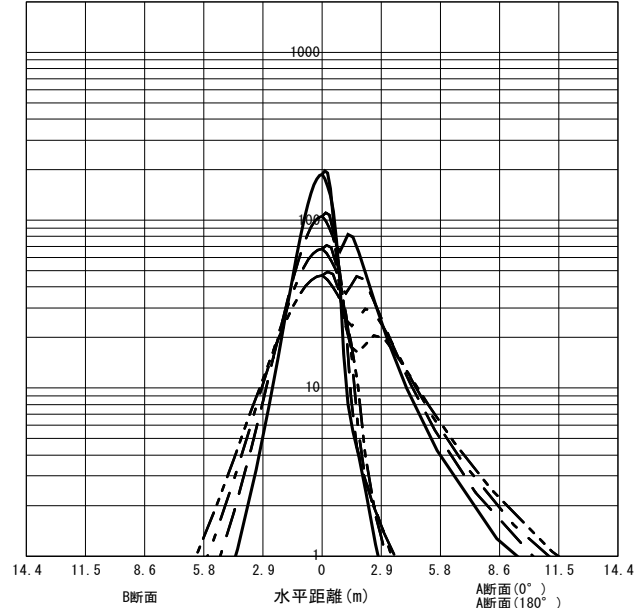

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	42	38	30	29	24	23	19	19	39	36	29	28	23	22	18	18	34	32	26	25	21	20	17	17	30	28	23	23	19	18	16	15	15	13				
0.80	49	45	38	35	30	29	25	25	46	42	36	34	29	28	24	24	40	37	32	30	26	26	22	22	35	33	28	27	24	23	20	20	19	16				
1.00	55	49	43	40	36	34	30	29	51	46	41	38	34	32	29	28	44	41	36	34	31	30	26	26	38	36	32	31	28	27	24	24	22	19				
1.25	60	53	49	45	41	39	35	34	56	50	46	43	39	37	34	32	48	44	41	38	35	34	31	30	42	39	36	34	31	30	28	27	26	22				
1.50	64	56	53	48	46	42	40	38	59	53	50	46	43	41	38	36	51	47	44	41	39	37	34	33	44	42	39	37	34	33	31	30	29	25				
2.00	69	60	60	54	53	48	47	44	64	57	56	51	50	46	45	42	56	51	49	46	44	42	40	38	48	45	43	41	39	38	36	35	33	29				
2.50	73	63	65	57	58	52	52	48	68	60	61	54	55	50	49	46	59	53	53	49	48	45	44	42	50	47	46	44	43	41	39	38	36	32				
3.00	76	65	68	60	62	55	56	51	70	62	64	57	58	53	53	49	61	55	56	51	51	48	48	45	52	49	49	46	45	43	42	41	39	34				
4.00	80	68	73	63	68	59	63	56	74	64	68	60	63	57	59	53	64	58	60	54	56	52	52	49	55	52	52	49	49	47	46	44	42	37				
5.00	82	69	76	66	71	62	67	59	76	66	71	62	67	59	63	56	66	59	62	57	59	54	56	52	57	53	54	51	51	49	49	47	45	40				
7.00	85	71	80	68	76	66	73	63	79	68	75	65	72	63	68	60	68	61	65	59	63	57	60	55	59	55	57	53	55	52	53	50	48	42				
10.00	87	73	84	71	81	69	78	67	81	70	78	68	75	66	73	64	70	63	68	61	66	60	64	58	61	57	59	56	57	54	56	53	50	45				

JIS C 8030:2014

三菱電機照明株式会社