


形名	EL-LW-VH4102A/3 AHN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1			通常時	
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40T・N/27/37・G3					
最大 取付 間隔	高さ	H					
	A-A'	1.4 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		17.9%	81.5%	99.3%			
保守率		良い	0.880	普通	0.860	悪い	0.810

○配光曲線図 (cd/1000lm)

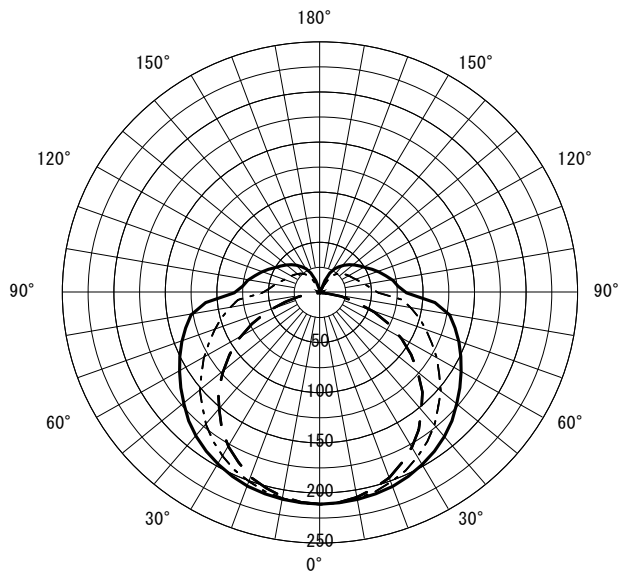

○直射水平面照度 (全光束: 3700 × 2 = 7400lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

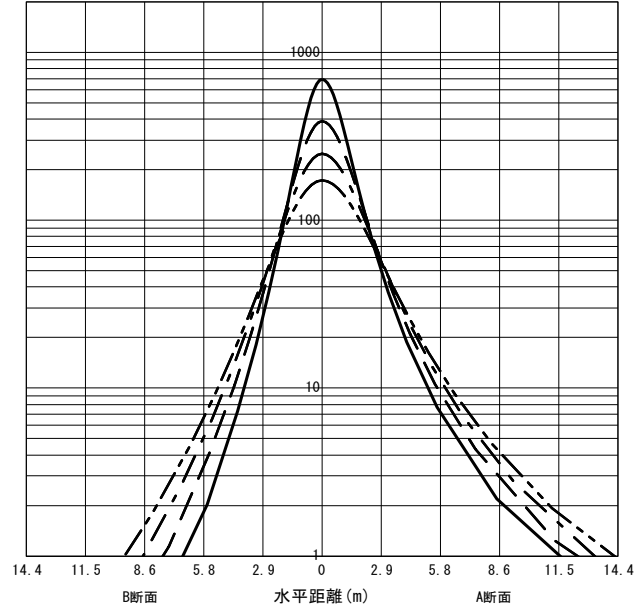

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照度率 (× 0.01)																																									
0.60	55	51	40	38	31	30	25	25	52	49	39	37	30	29	24	24	47	44	36	35	28	28	23	23	43	41	33	32	27	26	22	22	21	19								
0.80	66	60	51	48	41	40	34	33	63	57	49	46	40	38	33	33	56	52	45	43	37	36	32	31	51	48	42	40	35	34	30	30	29	26								
1.00	74	66	59	55	49	46	41	40	70	63	56	53	47	45	40	39	63	58	52	49	44	42	38	37	56	53	47	46	41	40	36	35	34	31								
1.25	81	72	67	61	57	53	49	47	77	69	64	59	55	52	48	46	68	63	58	55	51	49	45	43	61	58	53	51	47	46	42	41	40	36								
1.50	86	76	73	66	63	58	55	52	82	73	69	64	60	57	53	51	73	67	63	59	56	53	50	48	65	61	58	55	52	50	47	46	44	40								
2.00	94	82	82	73	72	66	65	60	89	78	78	71	69	64	63	59	79	72	71	66	64	60	58	56	71	66	64	61	59	56	54	53	51	47								
2.50	99	85	88	78	79	71	72	66	93	82	84	75	76	69	69	64	83	76	76	70	69	65	64	61	74	70	69	65	64	61	59	57	56	51								
3.00	103	88	93	81	85	75	78	70	97	85	88	79	81	73	75	68	86	78	80	73	74	69	69	65	77	72	72	68	67	64	63	61	59	55								
4.00	108	91	99	86	92	81	86	77	101	88	94	83	88	79	82	74	90	82	85	78	80	74	76	70	81	76	76	72	73	69	69	66	64	60								
5.00	111	94	104	89	97	85	92	81	104	90	98	86	93	82	88	79	93	84	88	80	84	77	80	74	83	78	79	75	76	72	73	70	68	63								
7.00	114	96	109	93	104	89	99	86	108	93	103	90	99	87	95	84	96	87	92	84	89	81	86	79	86	81	83	78	81	76	78	74	72	67								
10.00	118	98	113	96	109	93	106	91	111	95	107	93	104	90	101	88	99	89	96	87	93	85	91	83	88	83	86	81	84	80	82	78	76	71								

JIS C 8030:2014

三菱電機照明株式会社