


形名	EL-M10010N AHN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.880	普通	0.860	悪い	0.810

○配光曲線図 (cd/1000lm)

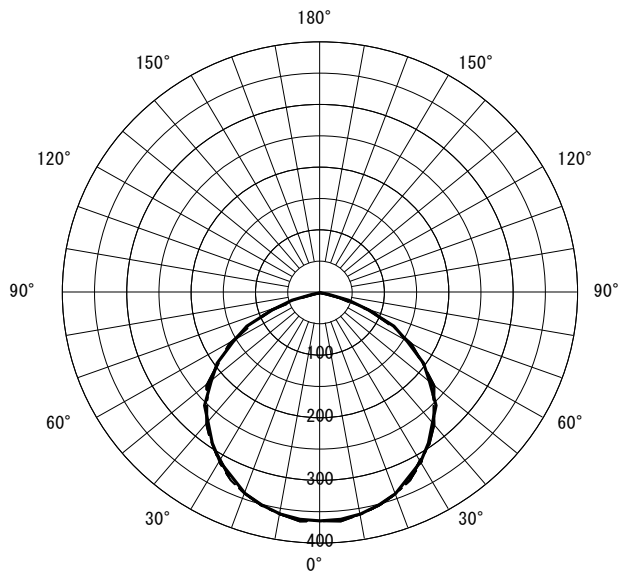

○直射水平面照度 (全光束: 10500 × 1 = 10500lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

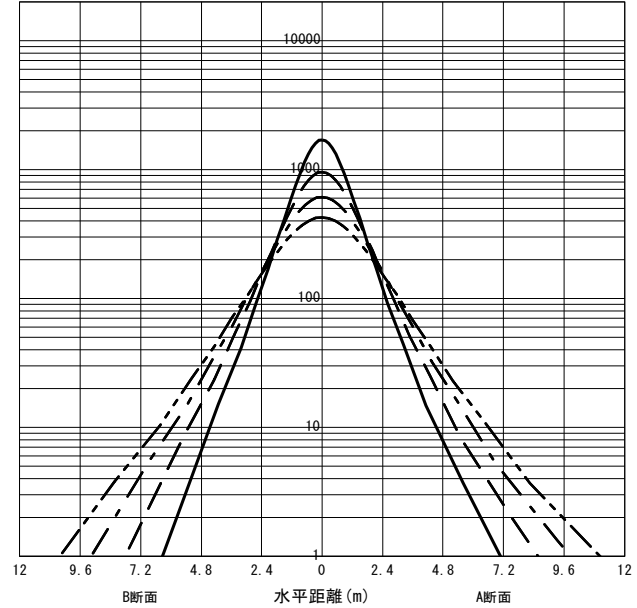

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																	
0.60	64	59	49	47	40	39	34	34	62	57	48	46	40	39	34	34	59	55	47	45	39	38	34	34	56	53	46	44	39	38	34	34	33	32
0.80	76	69	62	58	53	51	46	45	74	68	61	57	52	50	46	45	70	65	59	56	51	50	46	45	66	63	57	55	50	49	45	45	44	43
1.00	85	76	71	66	62	59	55	53	82	75	70	65	61	58	55	53	77	72	67	64	60	57	54	53	73	69	65	62	58	57	53	52	52	50
1.25	93	82	80	73	71	66	64	61	90	81	78	72	70	66	64	61	84	78	75	71	68	65	62	61	80	75	72	69	66	64	61	60	60	58
1.50	98	86	86	78	78	72	71	67	95	85	84	77	76	71	70	67	89	82	81	76	74	70	69	66	84	79	77	74	72	69	67	66	65	63
2.00	106	92	96	85	88	80	81	76	102	90	93	84	86	79	80	75	96	88	89	82	83	78	78	74	90	85	85	81	80	77	76	74	73	71
2.50	110	95	102	90	95	85	89	81	107	94	99	89	93	84	87	81	100	91	94	87	89	83	84	80	94	88	89	85	85	82	81	79	78	76
3.00	114	98	106	93	100	89	94	85	110	96	103	92	97	88	92	85	103	93	97	90	93	86	89	84	97	91	92	88	89	85	86	82	82	80
4.00	118	100	112	97	106	93	102	91	114	99	108	96	104	93	99	90	106	96	102	94	98	91	95	89	100	94	97	91	94	89	91	87	87	85
5.00	121	102	115	99	111	96	107	94	116	101	112	98	108	95	104	93	109	98	105	96	102	94	99	92	102	96	99	94	97	92	94	90	90	88
7.00	124	104	120	102	116	100	113	98	119	103	116	101	113	99	110	97	111	100	109	98	106	97	104	95	104	98	102	96	100	95	99	94	93	91
10.00	126	105	123	104	120	102	118	101	121	104	119	103	117	101	114	100	113	102	111	101	109	99	108	98	106	99	104	98	103	97	102	96	96	94

JIS C 8030:2014

三菱電機照明株式会社